

**CLC-2G18G-3330-S** is a Low Noise Amplifier providing a gain of 33 dB with a noise figure of 3.0 dB. The compact size and modularity makes it ideal for a wide range of applications.

**Features:**

- Frequency Range: 2.0-18.0 GHz
- Gain: 33 dB typ.
- Noise Figure: 4.2 dB max.
- Solder filtered pins for DC connection
- Low VSWR, unconditional stable


**Specifications:**


Frequency:	2.0- 18.0 GHz
Gain:	33 dB Typ
Gain Flatness:	±2.0 dB Typ
Noise Figure:	3.0 dB Typ, 4.2 dB Max
Output P1dB:	14 dBm Min
Spurious:	-60dBc Max
VSWR Input:	2.0:1 Typ
VSWR Output:	2.0:1 Typ
DC Voltage:	+12 V Typ
DC Supply Current:	180 mA Typ

**Environmental Ratings:**

Temperature:	-40°C to +75 °C Operating -55 °C to +125 °C Non-Operating
Vibration:	MIL-STD-202F, Method 204D Cond. B
Altitude:	MIL-STD-202F, Method 105C Cond. B
Temperature Cycle:	MIL-STD-202F, Method 107D Cond. A


**Mechanical Outline(Inches) :**

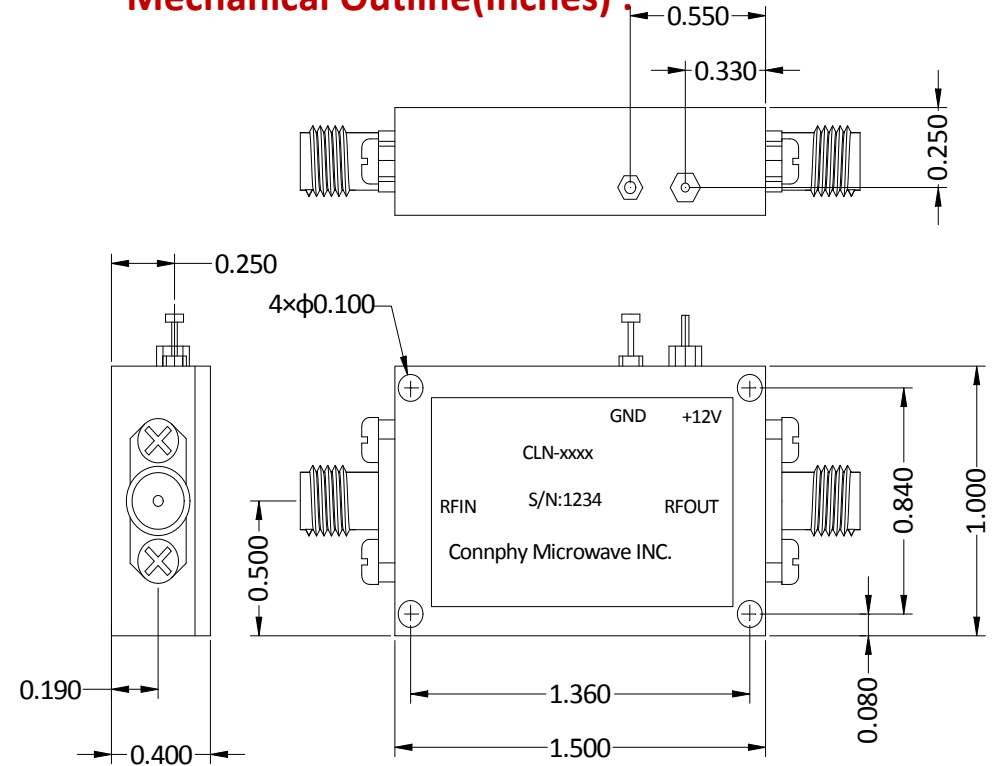


Low Noise Amplifier CLC-2G18G-3330-S			
DRAWN:	DWG NO.:	REV CODE: Rev.1.0	 <a href="http://www.connphy.com">www.connphy.com</a> <a href="mailto:sales@connphy.com">sales@connphy.com</a>
CHECKRD:	DATE: 14/05/15	SHEET : 1 OF 2	
ISSUED:	SIZE: A	SCALE : N / A	
			Notes: SPEC ARE SUBJECT TO CHANGE WITHOUT NOTICE.

## Typical Performance Data:


### Gain S21

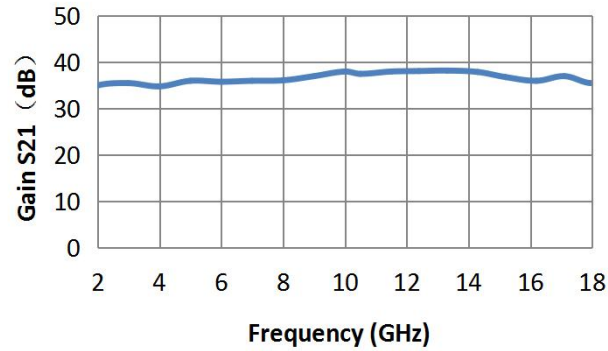


### S11

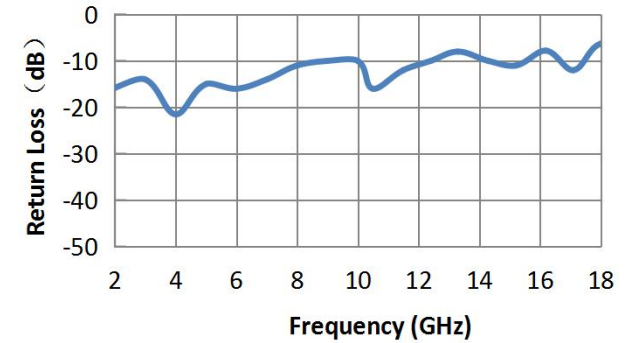

### S22

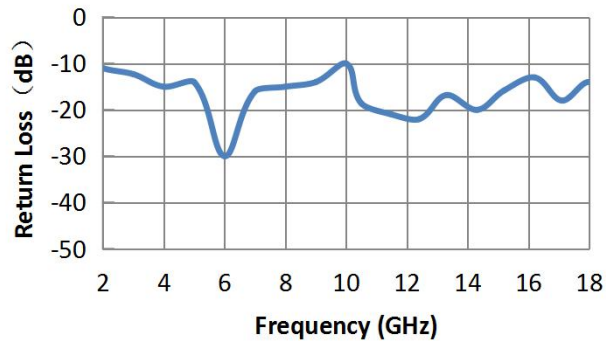

### Noise Figure

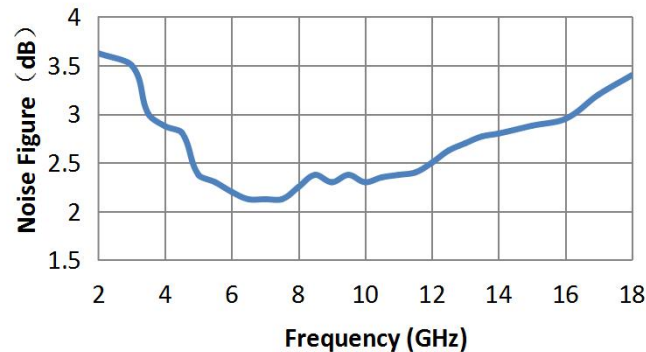


Note: Test data taken with case temperature of +23 °C

## Environmental Ratings:

Temperature:	-40°C to +75 °C Operating -55 °C to +125 °C Non-Operating
Vibration:	MIL-STD-202F, Method 204D Cond. B
Altitude:	MIL-STD-202F, Method 105C Cond. B
Temperature Cycle:	MIL-STD-202F, Method 107D Cond. A

### Low Noise Amplifier CLC-2G18G-3330-S

DRAWN:	DWG NO.:	REV CODE: Rev.1.0	 <a href="http://www.connphy.com">www.connphy.com</a> <a href="mailto:sales@connphy.com">sales@connphy.com</a>
CHECKRD:	DATE: 14/05/15	SHEET : 2 OF 2	
ISSUED:	SIZE: A	SCALE : N / A	
			Notes: SPEC ARE SUBJECT TO CHANGE WITHOUT NOTICE.