

CLC-6G18G-3825-S is a Low Noise Amplifier providing a gain of 38 dB with a noise figure of 2.5 dB. The compact size and modularity makes it ideal for a wide range of applications.

Features:

- Frequency Range: 6.0-18.0 GHz
- Gain: 35 dB min.
- Noise Figure: 3.5 dB max.
- Solder filtered pins for DC connection
- Low VSWR, unconditional stable


Specifications:


Frequency:	6.0-18.0 GHz
Gain:	38 dB Typ, 35 dB Min
Gain Flatness:	±2.0 dB Typ, ±2.5 dB Max
Noise Figure:	2.5 dB Typ, 3.5 dB Max
Output OP1dB:	18 dBm Typ
Output OIP3:	27 dBm Min
Spurious:	-60dBc Typ
VSWR Input:	1.8:1 Typ, 2.5:1 Max
VSWR Output:	1.8:1 Typ, 2.5:1 Max
DC Voltage:	+10 V to 15 V DC
DC Supply Current:	110 mA Typ

Environmental Ratings:

Temperature:	-40°C to +75 °C Operating -55 °C to +125 °C Non-Operating
Vibration:	MIL-STD-202F, Method 204D Cond. B
Altitude:	MIL-STD-202F, Method 105C Cond. B
Temperature Cycle:	MIL-STD-202F, Method 107D Cond. A


Mechanical Outline(Inches) :

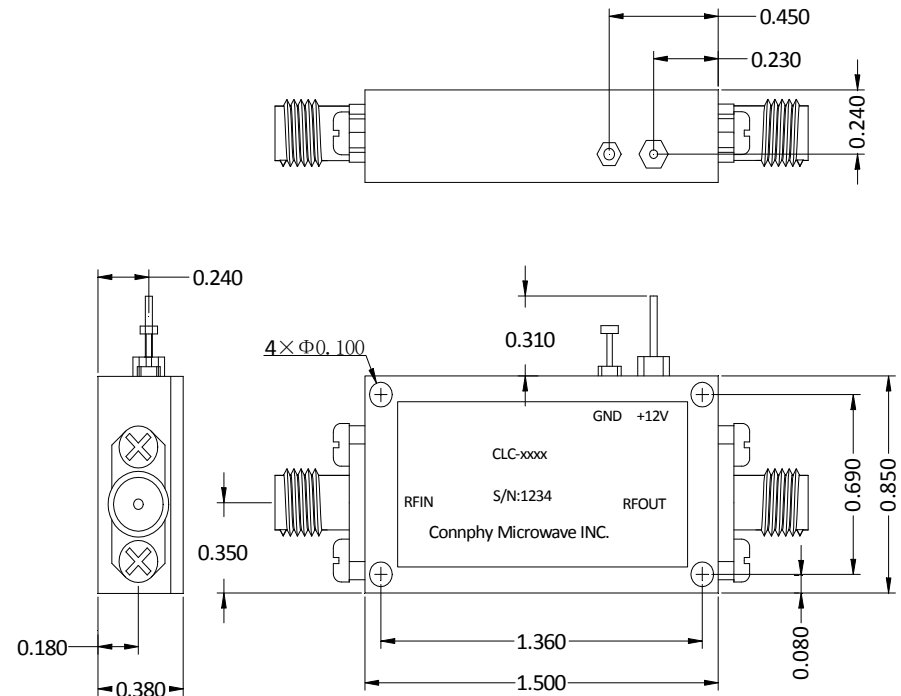


Low Noise Amplifier CLC-6G18G-3825-S			
DRAWN:	DWG NO.:	REV CODE: Rev.1.0	 www.connphy.com sales@connphy.com
CHECKRD:	DATE: 14/05/15	SHEET : 1 OF 2	
ISSUED:	SIZE: A	SCALE : N / A	
			Notes: SPEC ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Typical Performance Data:


Gain S21

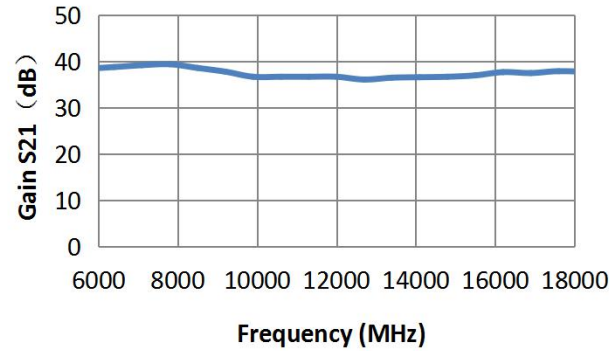


S11

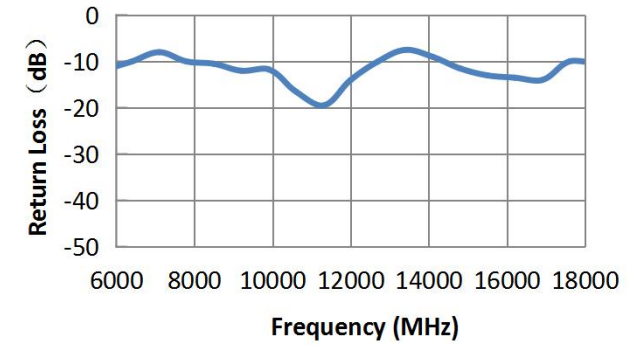

S22

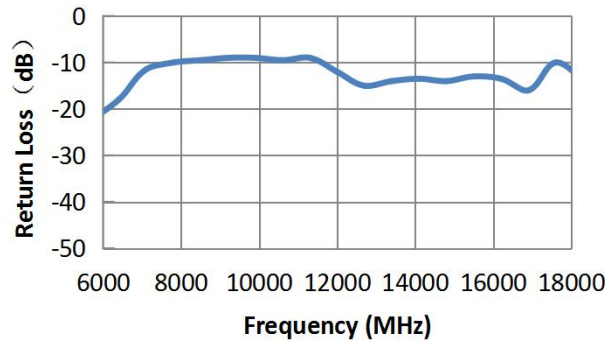

Noise Figure

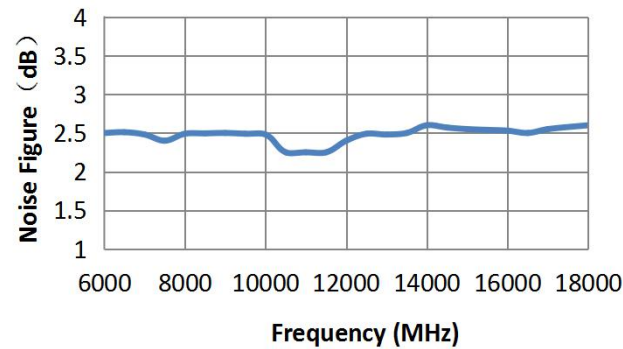


Note: Test data taken with case temperature of +23 °C

Environmental Ratings:

Temperature:	-40°C to +75 °C Operating -55 °C to +125 °C Non-Operating
Vibration:	MIL-STD-202F, Method 204D Cond. B
Altitude:	MIL-STD-202F, Method 105C Cond. B
Temperature Cycle:	MIL-STD-202F, Method 107D Cond. A

Low Noise Amplifier CLC-6G18G-3825-S

DRAWN:	DWG NO.:	REV CODE: Rev.1.0	 www.connphy.com sales@connphy.com
CHECKRD:	DATE: 14/05/15	SHEET : 2 OF 2	
ISSUED:	SIZE: A	SCALE : N / A	
			Notes: SPEC ARE SUBJECT TO CHANGE WITHOUT NOTICE.