

**CLN-18G26G-2028-S** is a Low Noise Amplifier providing a gain of 20 dB with a noise figure of 2.8 dB. The compact size and modularity makes it ideal for a wide range of applications.

**Features:**

- Frequency Range: 18.0-26.5 GHz
- Gain: 20 dB Min
- Noise Figure: 2.8 dB Max
- Solder filtered pins for DC connection
- Low VSWR, unconditional stable


**Specifications:**


Frequency:	18.0-26.5 GHz
Gain:	20 dB Min
Gain Flatness:	±1.5 dB Max
Noise Figure:	2.8 dB Max
Output P1dB:	20 dBm Min
Output IP3:	29 dBm Typ
VSWR Input:	2.0:1 Max
VSWR Output:	2.0:1 Max
DC Voltage:	+9 V to +15 V DC
DC Supply Current:	275 mA Typ
RF Connector:	SMA female

**Environmental Ratings:**

Temperature:	-40°C to +75 °C Operating -55 °C to +125 °C Non-Operating
Vibration:	MIL-STD-202F, Method 204D Cond. B
Altitude:	MIL-STD-202F, Method 105C Cond. B
Temperature Cycle:	MIL-STD-202F, Method 107D Cond. A

**Mechanical Outline(Inches):**

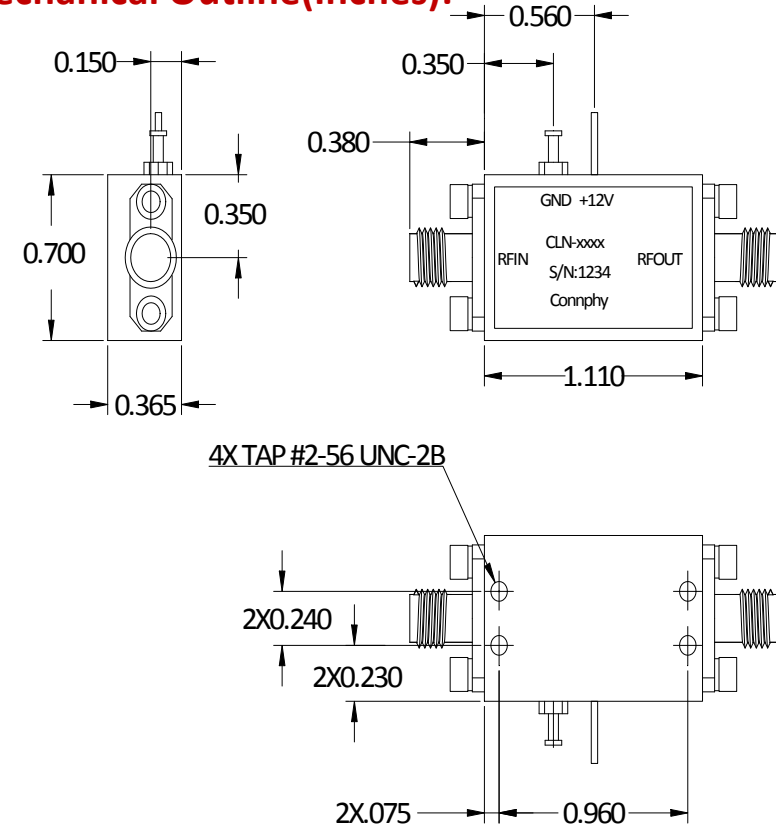

Low Noise Amplifier CLN-18G26G-2028-S			
DRAWN:	DWG NO.:	REV CODE: Rev.1.0	 <a href="http://www.connphy.com">www.connphy.com</a> <a href="mailto:sales@connphy.com">sales@connphy.com</a>
CHECKRD:	DATE: 14/05/15	SHEET : 1 OF 1	
DRAWN:	DWG NO.:	REV CODE: Rev.1.0	Notes: SPEC ARE SUBJECT TO CHANGE WITHOUT NOTICE.