

CLN-1G18G-3025-S is a Low Noise Amplifier providing a gain of 30 dB with a noise figure of 2.5 dB. The compact size and modularity makes it ideal for a wide range of applications.

Features:

- Frequency Range: 1.0-18.0 GHz
- Gain: 30 dB Min
- Noise Figure: 3.0 dB Max
- Solder filtered pins for DC connection
- Low VSWR, unconditional stable


Specifications:


Frequency:	1.0- 18.0 GHz
Gain:	30 dB Min
Gain Flatness:	±1.75 dB Max
Noise Figure:	2.5 dB Typ, 3.0 dB Max
Output P1dB:	15 dBm Min
VSWR Input:	2.2:1 Max
VSWR Output:	2.2:1 Max
DC Voltage:	+12 V DC Typ
DC Supply Current:	250 mA Typ
Input power:	20 dBm Max
RF Connector:	SMA Female

Environmental Ratings:

Temperature:	-40°C to +75 °C Operating -55 °C to +125 °C Non-Operating
Vibration:	MIL-STD-202F, Method 204D Cond. B
Altitude:	MIL-STD-202F, Method 105C Cond. B
Temperature Cycle:	MIL-STD-202F, Method 107D Cond. A


Mechanical Outline(Inches):

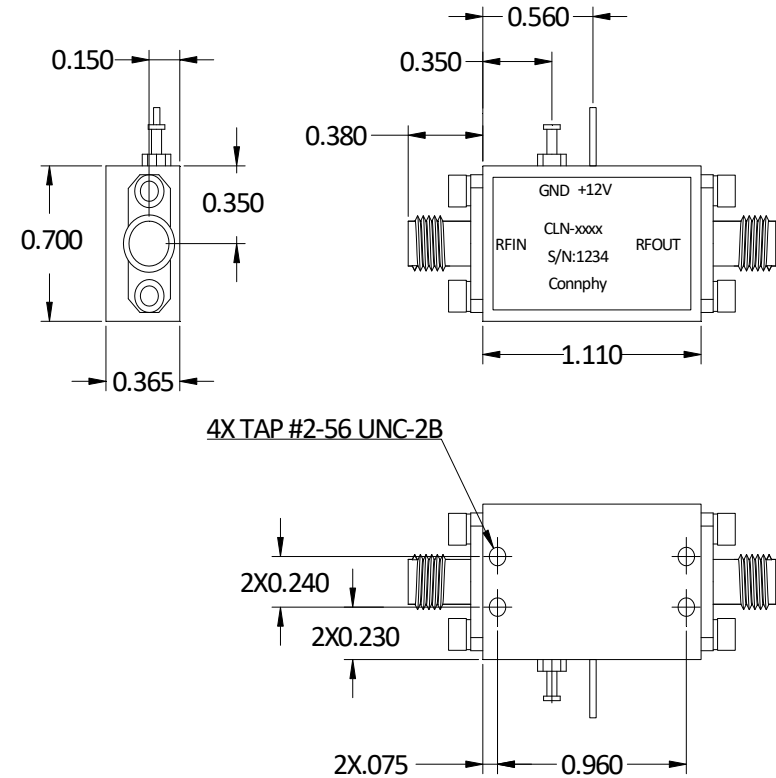


Low Noise Amplifier CLN-1G18G-3025-S			
DRAWN:	DWG NO.:	REV CODE: Rev.1.0	 www.connphy.com sales@connphy.com
CHECKRD:	DATE: 14/05/15	SHEET : 1 OF 2	
ISSUED:	SIZE:	SCALE : N / A	
			Notes: SPEC ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Typical Performance Data:


Gain S21

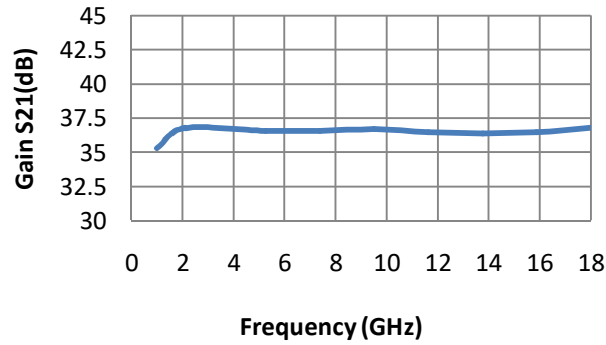


S11

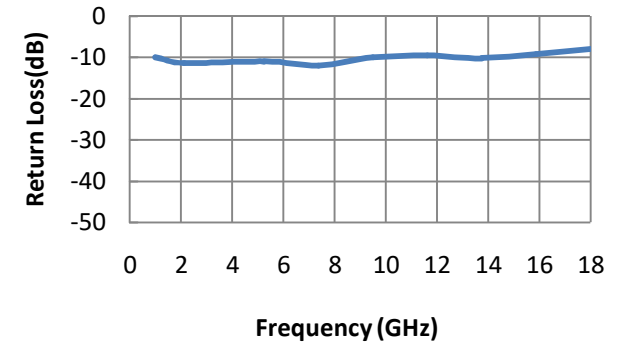


S22

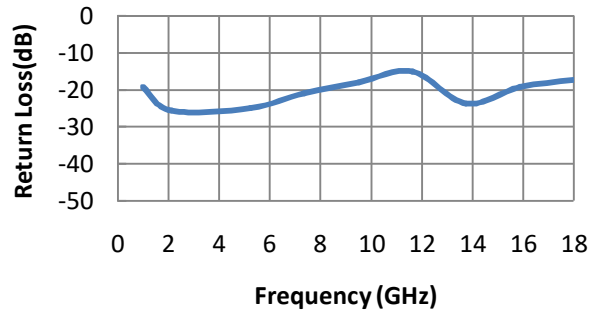

Noise Figure

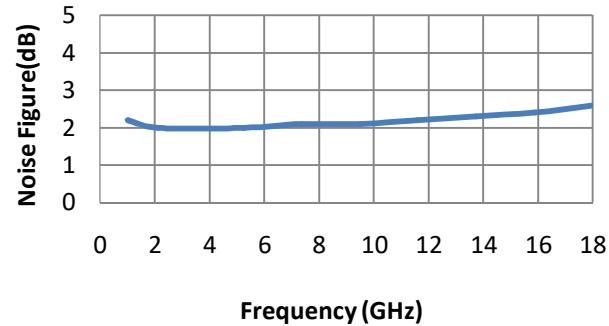


Output P1dB

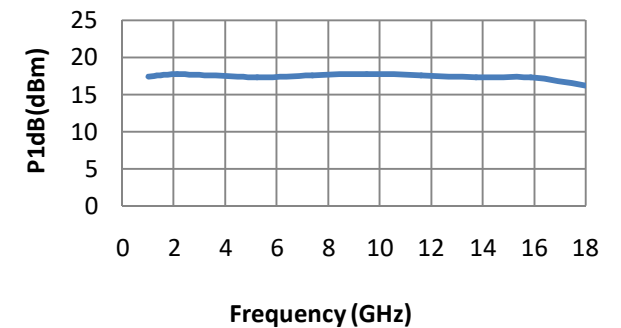

Note: Test data taken with case temperature of +23 °C

Environmental Ratings:

Temperature:	-40°C to +75 °C Operating -55 °C to +125 °C Non-Operating
Vibration:	MIL-STD-202F, Method 204D Cond. B
Altitude:	MIL-STD-202F, Method 105C Cond. B
Temperature Cycle:	MIL-STD-202F, Method 107D Cond. A

Low Noise Amplifier CLN-1G18G-3025-S			
DRAWN:	DWG NO.:	REV CODE: Rev.1.0	 www.connphy.com sales@connphy.com
CHECKRD:	DATE: 14/05/15	SHEET : 2 OF 2	
ISSUED:	SIZE:	SCALE : N / A	
			Notes: SPEC ARE SUBJECT TO CHANGE WITHOUT NOTICE.