

**CLN-1G40G-3060-K** is a Low Noise Amplifier providing a gain of 30 dB with a noise figure of 6.0 dB. The compact size and modularity makes it ideal for a wide range of applications.

**Features:**

- Frequency Range: 1.0-40.0 GHz
- Gain: 30 dB Min
- Noise Figure: 6.0 dB Max
- Solder filtered pins for DC connection
- Low VSWR, unconditional stable


**Specifications:**


Frequency:	1.0 -40.0 GHz
Gain:	30 dB Min
Gain Flatness:	±3.25dB Max
Noise Figure:	6 dB Max
Output P1dB:	5 dBm Min
Output IP3:	15 dBm Typ
VSWR Input:	2.5:1 Typ
VSWR Output:	2.5:1 Typ
DC Voltage:	+9 V to +12 V DC
DC Supply Current:	300 mA Typ
RF Connector:	2.92mm Female

**Environmental Ratings:**

Temperature:	-40°C to +75 °C Operating -55 °C to +125 °C Non-Operating
Vibration:	MIL-STD-202F, Method 204D Cond. B
Altitude:	MIL-STD-202F, Method 105C Cond. B
Temperature Cycle:	MIL-STD-202F, Method 107D Cond. A

**Mechanical Outline(inches):**

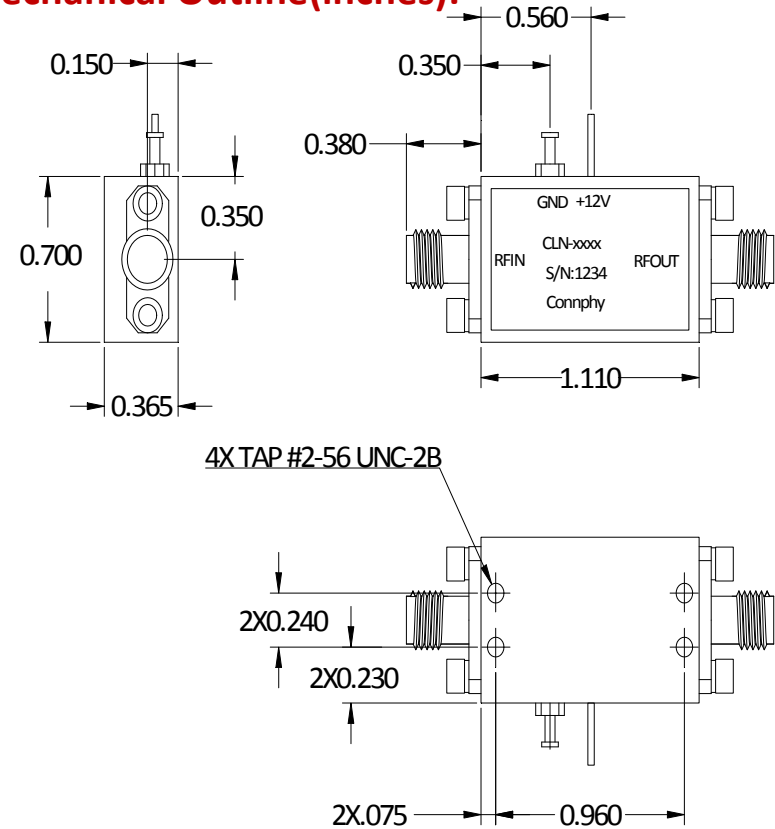

Low Noise Amplifier CLN-1G40G-3060-K			
DRAWN:	DWG NO.:	REV CODE: Rev.1.0	 <a href="http://www.connphy.com">www.connphy.com</a> <a href="mailto:sales@connphy.com">sales@connphy.com</a>
CHECKRD:	DATE: 14/05/15	SHEET : 1 OF 1	
ISSUED:	SIZE: A	SCALE : N / A	
			Notes: SPEC ARE SUBJECT TO CHANGE WITHOUT NOTICE.