

**CLN-26G40G-2042-K** is a Low Noise Amplifier providing a gain of 20 dB with a noise figure of 4.2 dB. The compact size and modularity makes it ideal for a wide range of applications.

**Features:**

- Frequency Range: 26.5- 40 GHz
- Gain: 20dB Min
- Noise Figure: 4.2 dB Max.
- Unconditionally Stable
- Solder filtered pins for DC connection


**Specifications:**


Frequency:	26.5-40 GHz
Gain:	20 dB Min
Gain Flatness:	±2.5 dB Max
Noise Figure:	4.2 dB Max
Output P1dB:	10 dBm Min
Output IP3:	18 dBm Typ
VSWR Input:	2.5:1 Max
VSWR Output:	2.5:1 Max
DC Voltage:	+9 V to 15 V DC
DC Supply Current:	150 mA Typ
RF Connector:	2.92mm female

**Environmental Ratings:**

Temperature:	-40°C to +75 °C Operating -55 °C to +125 °C Non-Operating
Vibration:	MIL-STD-202F, Method 204D Cond. B
Altitude:	MIL-STD-202F, Method 105C Cond. B
Temperature Cycle:	MIL-STD-202F, Method 107D Cond. A

**Mechanical Outline(Inches):**

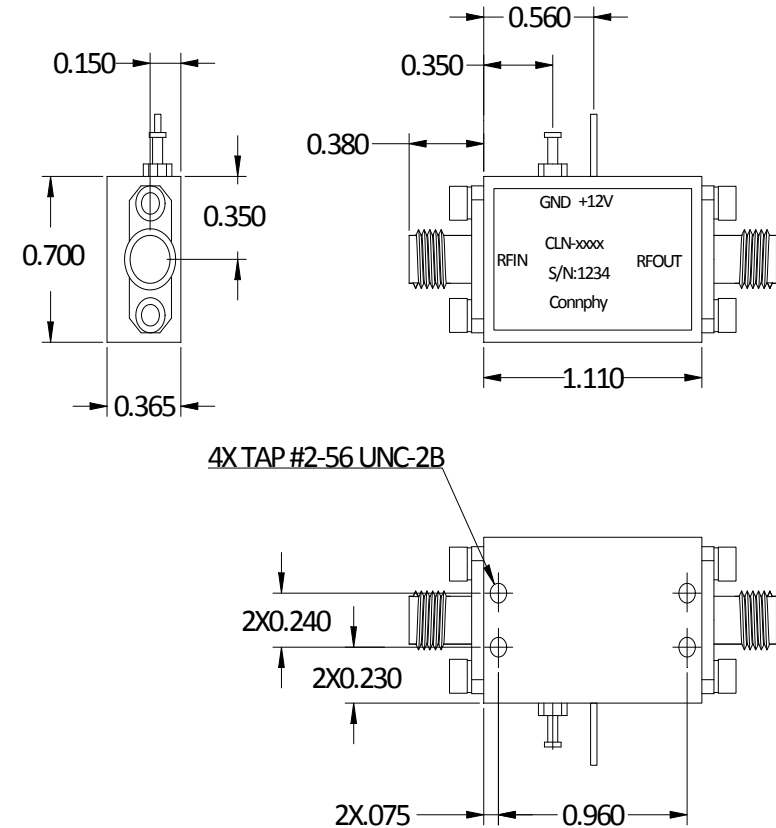

Low Noise Amplifier CLN-26G40G-2042-K			
DRAWN:	DWG NO.:	REV CODE: Rev.1.0	 <a href="http://www.connphy.com">www.connphy.com</a> <a href="mailto:sales@connphy.com">sales@connphy.com</a>
CHECKRD:	DATE: 14/05/15	SHEET : 1 OF 1	
ISSUED:	SIZE: A	SCALE : N / A	
			Notes: SPEC ARE SUBJECT TO CHANGE WITHOUT NOTICE.