

CLN-4.5G6.5G-2710-S is a Low Noise Amplifier providing a gain of 27 dB with a noise figure of 1.0 dB. The compact size and modularity makes it ideal for a wide range of applications.

Features:

- Frequency Range: 4.5-6.5 GHz
- Gain: 27 dB min.
- Noise Figure: 1.0 dB max.
- Solder filtered pins for DC connection
- Low VSWR, unconditional stable


Specifications:


Frequency:	4.5-6.5 GHz
Gain:	27 dB Min, 29 dB Max
Gain Flatness:	±1.0 dB Max
Noise Figure:	1.0 dB Max, 0.6 dB Typ
Output P1dB:	10 dBm Min
VSWR Input:	2.0:1 Max
VSWR Output:	2.0:1 Max
DC Voltage:	+5 to +8 V
DC Supply Current:	100 mA Max

Environmental Ratings:

Temperature:	-40°C to +75 °C Operating -55 °C to +125 °C Non-Operating
Vibration:	MIL-STD-202F, Method 204D Cond. B
Altitude:	MIL-STD-202F, Method 105C Cond. B
Temperature Cycle:	MIL-STD-202F, Method 107D Cond. A

Mechanical Outline(Inches):

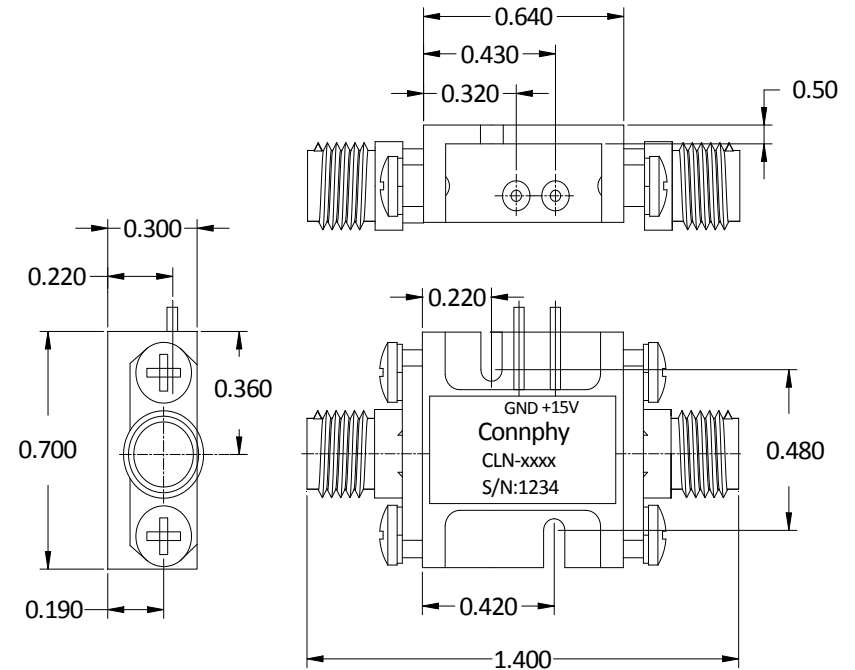

Low Noise Amplifier CLN-4.5G6.5G-2710-S			
DRAWN:	DWG NO.:	REV CODE: Rev.1.0	 www.connphy.com sales@connphy.com
CHECKRD:	DATE: 14/05/15	SHEET : 1 OF 1	
ISSUED:	SIZE: A	SCALE : N / A	
			Notes: SPEC ARE SUBJECT TO CHANGE WITHOUT NOTICE.