

CLN-4G8G-4007-S is a Low Noise Amplifier providing a gain of 40 dB with a noise figure of 0.7 dB. The compact size and modularity makes it ideal for a wide range of applications.

Features:

- Frequency Range: 4.0-8.0 GHz
- Gain: 35 dB Min
- Noise Figure: 0.7 dB Max
- Solder filtered pins for DC connection
- Low VSWR, unconditional stable


Specifications:


Frequency:	4.0-8.0 GHz
Gain:	40 dB Typ, 35 dB Min
Gain Flatness:	±1.0 dB Max
Noise Figure:	0.7 dB Max
Output P1dB:	10 dBm Min
Output IP3:	26 dBm Typ
VSWR Input:	2.0:1 Max
VSWR Output:	2.0:1 Max
DC Voltage:	+12 V to +15 V DC
DC Supply Current:	150 mA Max

Environmental Ratings:





Temperature:	-40°C to +75 °C Operating -55 °C to +125 °C Non-Operating
Vibration:	MIL-STD-202F, Method 204D Cond. B
Altitude:	MIL-STD-202F, Method 105C Cond. B
Temperature Cycle:	MIL-STD-202F, Method 107D Cond. A

Mechanical Outline(Inches):

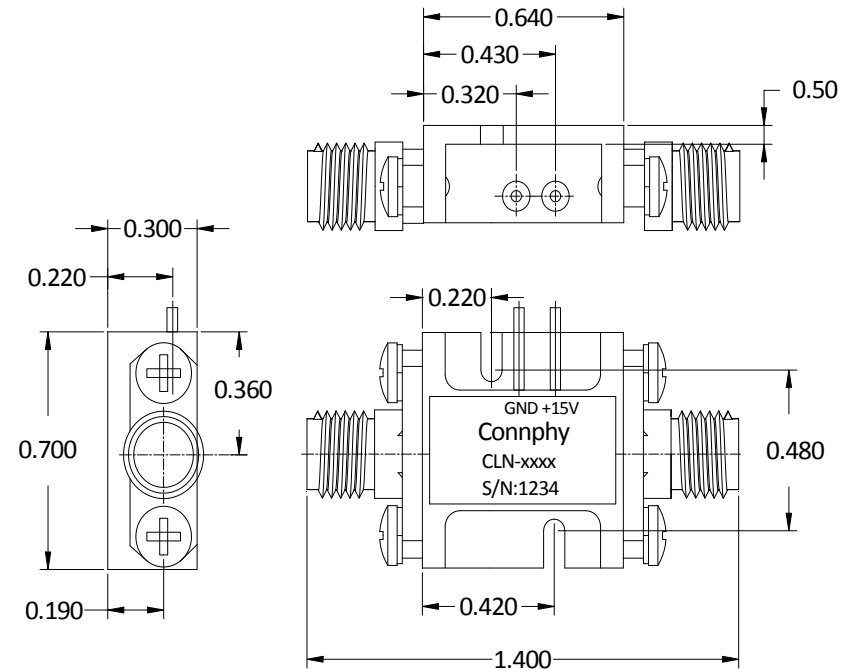

Low Noise Amplifier CLN-4G8G-4007-S			
DRAWN:	DWG NO.:	REV CODE: Rev.1.0	 www.connphy.com sales@connphy.com
CHECKRD:	DATE: 14/05/15	SHEET : 1 OF 2	
ISSUED:	SIZE: A	SCALE : N / A	Notes: SPEC ARE SUBJECT TO CHANGE WITHOUT NOTICE.


Typical Performance Data:

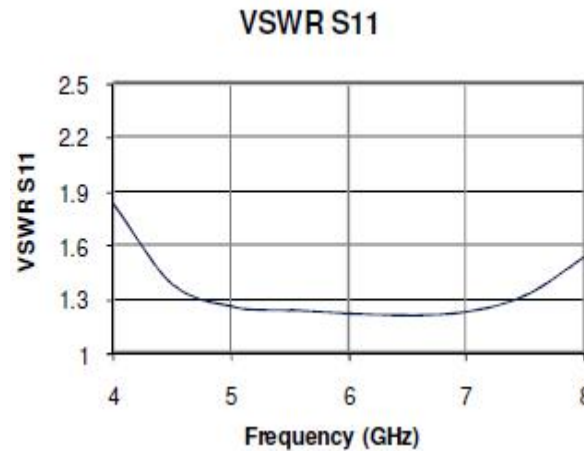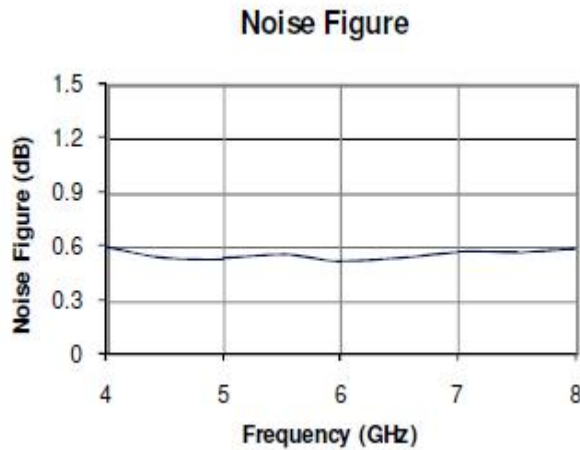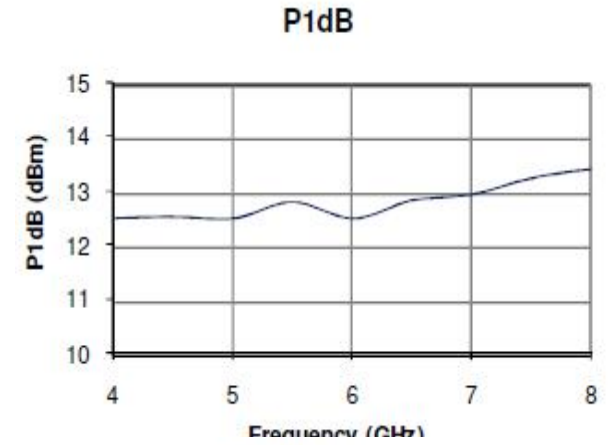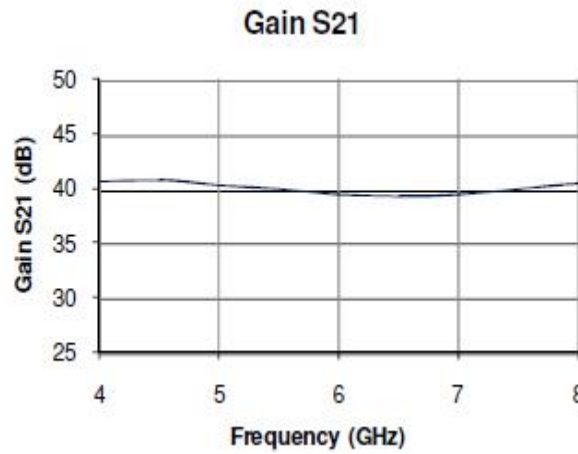

Environmental Ratings:

Temperature:	-40°C to +75 °C Operating -55 °C to +125 °C Non-Operating
Vibration:	MIL-STD-202F, Method 204D Cond. B
Altitude:	MIL-STD-202F, Method 105C Cond. B
Temperature Cycle:	MIL-STD-202F, Method 107D Cond. A

Low Noise Amplifier CLN-4G8G-4007-S

DRAWN:	DWG NO.:	REV CODE: Rev.1.0	 www.connphy.com sales@connphy.com
CHECKRD:	DATE: 14/05/15	SHEET : 2 OF 2	
ISSUED:	SIZE: A	SCALE : N / A	
			Notes: SPEC ARE SUBJECT TO CHANGE WITHOUT NOTICE.