

CMC-17G21G-4036-S is a wideband medium power amplifier providing up to 36 dBm and a gain of 40 dB. The compact size and modularity makes it ideal for a wide range of applications.


Features:

- Frequency Range: 17.5 to 21.5 GHz
- P1dB: 36 dBm Min
- Flat Small Signal Gain: 40 dB Typ
- Small size, low cost
- Unconditionally Stable

Specifications:


Frequency:	17.5-21.5 GHz
Gain:	40 dB Typ, 37 dB Min
Gain Flatness:	±1.75 dB Max
Noise Figure:	8.0 dB Max
Output P1dB:	36 dBm Min
Output IP3:	45 dBm Typ
VSWR Input:	2.5:1 Max
VSWR Output:	2.5:1 Max
DC Voltage:	+9 to +12 V DC
DC Supply Current:	3500 mA Typ

Mechanical Outline(Inches):

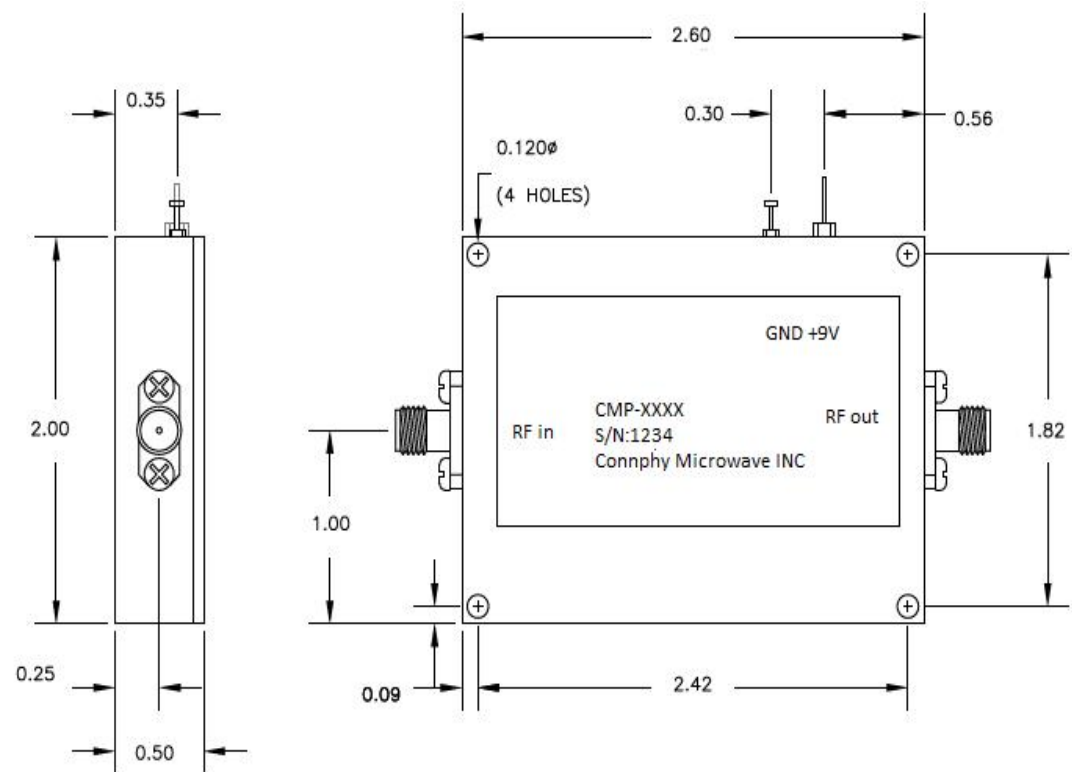

Environmental Ratings:

Temperature:	-40°C to +75 °C Operating -55 °C to +125 °C Non-Operating
Vibration:	MIL-STD-202F, Method 204D Cond. B
Altitude:	MIL-STD-202F, Method 105C Cond. B
Temperature Cycle:	MIL-STD-202F, Method 107D Cond. A

Medium Power Amplifier CMC-17G21G-4036-S			
DRAWN:	DWG NO.:	REV CODE: Rev.1.0	 www.connphy.com sales@connphy.com
CHECKRD:	DATE: 12/10/15	SHEET : 1 OF 2	
ISSUED:	SIZE: A	SCALE : N / A	
			Notes: SPEC ARE SUBJECT TO CHANGE WITHOUT NOTICE.