

CMC-8G10G-3836-S is a wideband medium power amplifier providing up to 36 dBm and a gain of 38 dB. The compact size and modularity makes it ideal for a wide range of applications.

Features:

- Frequency Range: 8.0 to 10.0 GHz
- P1dB: 36 dBm Typ
- Flat Small Signal Gain: 38 dB Typ
- Small size, low cost
- Unconditionally Stable


Specifications:


Frequency:	8.0-10.0 GHz
Gain:	38 dB Typ ,35 dB Min
Gain Flatness:	±1.5 dB Max
Noise Figure@25°C:	6.0 dB Typ, 8.0 dB Max
Output P1dB:	36 dBm Typ, 35 dBm Min
Output IP3 :	43 dBm Typ
Non-Harmonic Spurious:	-60 dBc Typ
Reverse Isolation:	60 dB Typ
VSWR Input:	1.6:1 Typ,2.0:1 Max
VSWR Output:	1.6:1 Typ,2.5:1 Max
DC Voltage:	+8 V to +10 V DC
DC Supply Current:	3300 mA Typ
RF Connector:	SMA female

Environmental Ratings:

Temperature:	-40°C to +75 °C Operating
	-55 °C to +125 °C Non-Operating
Vibration:	MIL-STD-202F, Method 204D Cond. B
Altitude:	MIL-STD-202F, Method 105C Cond. B
Temperature Cycle:	MIL-STD-202F, Method 107D Cond. A

Mechanical Outline(Inches) :

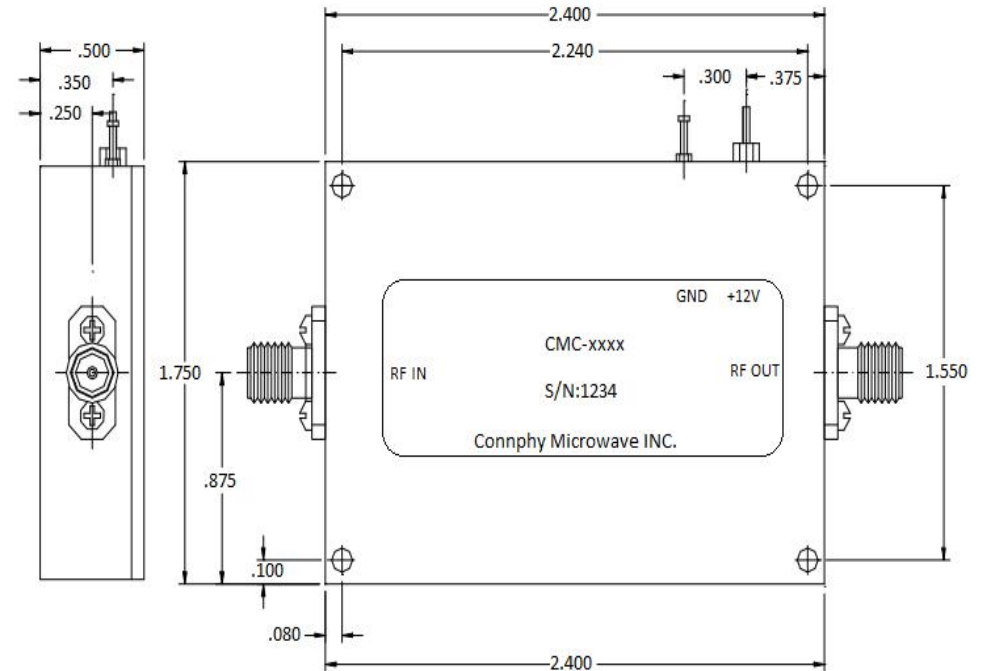

Medium Power Amplifier CMC-8G10G-3836-S			
DRAWN:	DWG NO.:	REV CODE: Rev.1.0	 www.connphy.com sales@connphy.com
CHECKRD:	DATE: 12/10/15	SHEET : 1 OF 1	
ISSUED:	SIZE: A	SCALE : N / A	
			Notes: SPEC ARE SUBJECT TO CHANGE WITHOUT NOTICE.