

CMP-2G18G-2027-S is a wideband medium power amplifier providing up to 27 dBm and a gain of 20 dB. The compact size and modularity makes it ideal for a wide range of applications.

Features:

- Frequency Range: 2 to 18 GHz
- Psat: 27 dBm Min
- Flat Small Signal Gain: 20 dB Min
- Small size, low cost
- Unconditionally Stable


Specifications:


Frequency:	2.0 GHz to 18.0 GHz
Gain:	20 dB Min
Gain Flatness:	±1.8 dB Max
Noise Figure:	5.0 dB Max
Output Psat:	27 dBm Min
VSWR Input:	2.2:1 Max
VSWR Output:	2.2:1 Max
DC Voltage:	+15 VDC
DC Supply Current:	1000 mA Typ
RF Connectors:	SMA Female

Environmental Ratings:

Temperature:	0°C to +55 °C Operating -25 °C to +75 °C Non-Operating
Vibration:	MIL-STD-202F, Method 204D Cond. B
Altitude:	MIL-STD-202F, Method 105C Cond. B
Temperature Cycle:	MIL-STD-202F, Method 107D Cond. A

Mechanical Outline(Inches) :

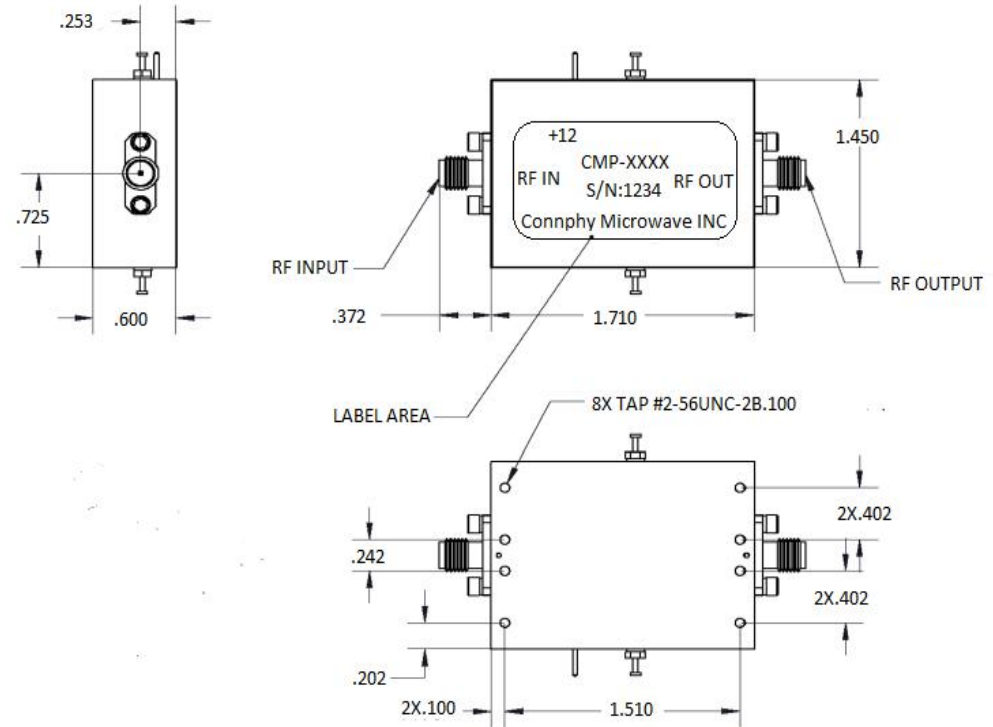

Medium Power Amplifier CMP-2G18G-2027-S			
DRAWN:	DWG NO.:	REV CODE: Rev.1.0	 www.connphy.com sales@connphy.com
CHECKRD:	DATE: 09/12/15	SHEET : 1 OF 1	
ISSUED:	SIZE: A	SCALE : N / A	
Notes: SPEC ARE SUBJECT TO CHANGE WITHOUT NOTICE.			