

**CDAT-1G40G-62-6** is an digital controlled attenuator that operates over the 1.0 to 40.0 GHz frequency range. This model utilizes 6 bits control, the corresponding attenuation is 0-62 dB.

Features:

- Wide Bandwidth
- Fast Response
- Low VSWR
- Miniature Size

**Specifications:**

Frequency Range:	1.0-40.0 GHz
Attenuation Range:	62 dB Max
Insertion Loss:	13.0 dB Max
Attenuation Flatness:	+/-2.5 dB Max
VSWR Input:	2.5:1 Max
VSWR Output :	2.5:1 Max
Control Bits:	6 bits
Least Significant Bit (LSB):	1 dB
Control Logic:	TTL
Power Handling:	+23 dBm CW Max
Power Supply:	+5 V @ 40 mA Typ
Switching Time:	500 ns Max


**Environmental Ratings:**


Temperature:	-45°C to +85 °C Operating -55 °C to +125 °C Non-Operating
Vibration:	MIL-STD-202F, Method 204D Cond. B
Altitude:	MIL-STD-202F, Method 105C Cond. B
Temperature Cycle:	MIL-STD-202F, Method 107D Cond. A

**Mechanical Specifications:**


Parameter	Specification
Dimensions WxHxD	1.45X1.20X0.65 inches
RF Connectors In/Out	2.92mm-Female
DC Connector	MICRO-D9 (Female)
Material	Aluminum

**DC Connector PIN Assignment:**

Pin	Function	Pin Definition
1	+5V	
2	GND	
3-8	Bit1-Bit6	
9	NC	

Digital Control PIN Attenuators CDAT-1G40G-62-6			
DRAWN:	DWG NO.:	REV CODE: Rev.1.0	 <a href="http://www.connphy.com">www.connphy.com</a> <a href="mailto:sales@connphy.com">sales@connphy.com</a>
CHECKRD:	DATE: 08/07/15	SHEET : 1 OF 2	
ISSUED:	SIZE: A	SCALE : N / A	Notes: SPEC ARE SUBJECT TO CHANGE WITHOUT NOTICE.

## Mechanical Outline (Inches):

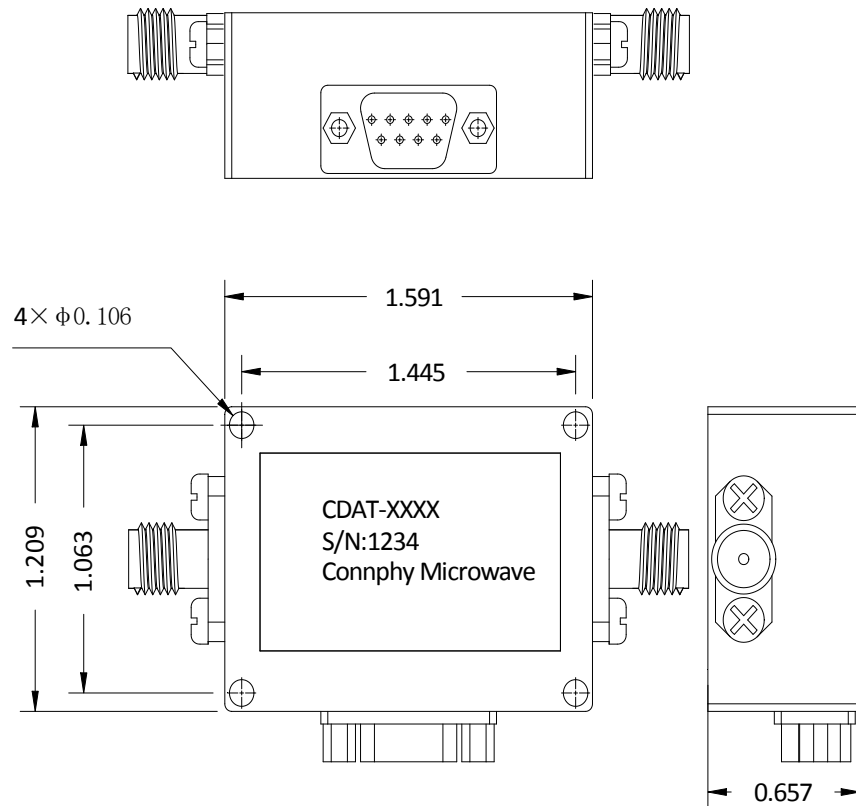

## Truth Table :


Control TTL Input for 6 bits resolution						Attenuation
Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	
0	0	0	0	0	0	Reference
0	0	0	0	0	1	1.0 dB
0	0	0	0	1	0	2.0 dB
0	0	0	1	0	0	4.0 dB
0	0	1	0	0	0	8.0 dB
0	1	0	0	0	0	16.0 dB
1	0	0	0	0	0	31.0 dB
1	1	1	1	1	1	62.0 dB

## Environmental Ratings:

Temperature:	-45°C to +85 °C Operating -55 °C to +125 °C Non-Operating
Vibration:	MIL-STD-202F, Method 204D Cond. B
Altitude:	MIL-STD-202F, Method 105C Cond. B
Temperature Cycle:	MIL-STD-202F, Method 107D Cond. A

## Digital Control PIN Attenuators

### CDAT-1G40G-62-6

DRAWN:	DWG NO.:	REV CODE: Rev.1.0	 <a href="http://www.connphy.com">www.connphy.com</a> <a href="mailto:sales@connphy.com">sales@connphy.com</a>
CHECKRD:	DATE: 08/07/15	SHEET : 2 OF 2	
ISSUED:	SIZE: A	SCALE : N / A	
			Notes: SPEC ARE SUBJECT TO CHANGE WITHOUT NOTICE.