
**DL-DC3G-10-5** is a single channel delay line, which is programmable, designed for adjusting the time delay or phase of radio, microwave or even digital signals with bandwidths from DC to 3 GHz.

Features :

frequency range: DC~3G; Step size option: 5ps, 10ps, or 20ps; XX-XX-5 for 5ps step size;

## Mechanical Outline(Inch):

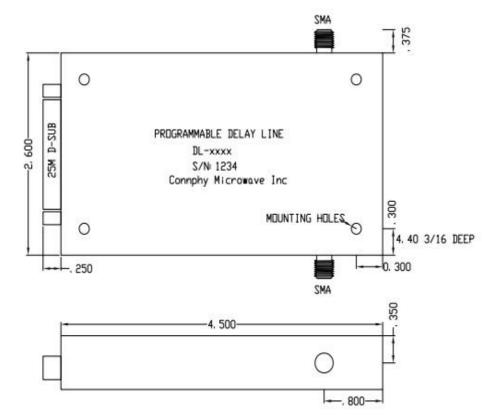

## **Environmental Ratings:**

Temperature:	-25°C to +80 °C Operating
	-65 °C to +100 °C Non-Operating
Vibration:	MIL-STD-810F, Method 514.5 Cond. B
Altitude:	MIL-STD-202F, Method 105C Cond. B
Temperature Cycle:	MIL-STD-202F, Method 107D Cond. A

10 bits range; Time or phase shifting, with very compact size

## Specifications:

Bandwidth(4dB): Step size(ps): Accuracy: VSWR max: Insertion loss: Linearity:		3 GHz 5, 10, 20 optional, eg: DL-DC3G-10-5 for 5ps step size		
		1 LSB 1.3 for DC to 2 GHz; 1.5 for 2 to 3 GHz <6.0 dB DC to 2 GHz <7.5 dB 2 to 3 GHz +0.18 dB/ns at 2 GHz +0.5 dB DC to 2 GHz +1.0 dB 2 to 3 GHz		
			elay DC30	Line 6-10-5
DRAWN:	DWG NO.:	REV ( Rev.1	CODE: 0	<b>CONNPHY</b> Microwave Inc.
CHECKRD:	DATE: 15/03/15	SHEE 1 OF		www.connphy.com sales@connphy.com
ISSUED:	SIZE: A	SCAL N / A		Notes: SPEC ARE SUBJECT TO CHANGE WITHOUT NOTICE.

**DL-DC3G-10-5** is a single channel delay line, which is programmable, designed for adjusting the time delay or phase of radio, microwave or even digital signals with bandwidths from DC to 3 GHz.

Features :

frequency range: DC~3G;

Step size option: 5ps, 10ps, or 20ps; XX-XX-5 for 5ps step size;

10 bits range; Time or phase shifting, with very compact size

## Pin Definition:

1-10	DO - D9 data, active high
11	LE Latch line, active low
12	NC
13	NC
14-17	+5.0V Power
18-25	Ground

Delay Line DL-DC3G-10-5					
DRAWN:	DWG NO.:	REV CODE: Rev.1.0	<b>CONNPHY</b> Microwave Inc.		
CHECKRD:	DATE:	SHEET :	www.connphy.com		
	15/03/15	2 OF 2	sales@connphy.com		
ISSUED:	SIZE:	SCALE :	Notes: SPEC ARE SUBJECT TO		
	A	N / A	CHANGE WITHOUT NOTICE.		