


DC-1M0.5G-10-S is a $10\pm 0.5\text{dB}$ coupling directional coupler, designed to operate over the 1M-0.5GHz frequency range, with compact size. This model is designed to handle 1W mx input power, and also performs with low insertion loss of 1.2dB max and with coupling flatness of $\pm 0.4\text{dB}$ max, and low VSWR of 1.3 max.

Mechanical Outline(Inch/mm):

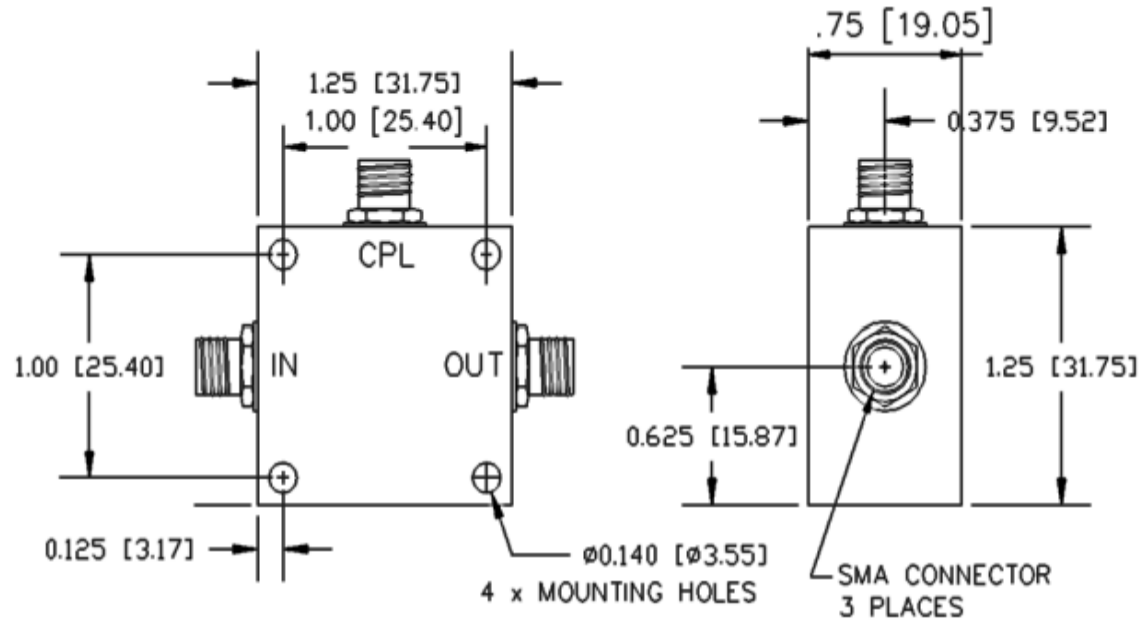


Specifications:

Coupling:	10±0.5dB
Frequency:	1M-0.5GHz
Insertion Loss:	1.2dB max
Coupling flatness:	±0.4dB max
Directivity:	25dB min
Power Handling:	1W max
VSWR:	1.3:1 max
Connectors:	SMA-F (N optional)

Environmental Ratings:

Temperature:	-25°C to +71 °C Operating -65 °C to +100 °C Non-Operating
Vibration:	MIL-STD-202F, Method 204D Cond. B
Altitude:	MIL-STD-202F, Method 105C Cond. B
Temperature Cycle:	MIL-STD-202F, Method 107D Cond. A

Directional Coupler DC-1M0.5G-10-S			
DRAWN:	DWG NO.:	REV CODE: Rev.1.0	 www.connphy.com sales@connphy.com
CHECKRD:	DATE: 18/04/15	SHEET : 1 OF 1	
ISSUED:	SIZE: A	SCALE : N / A	Notes: SPEC ARE SUBJECT TO CHANGE WITHOUT NOTICE.