


**DDCHP-0.5M0.1G-30-S** is a  $30\pm 1\text{dB}$  coupling high power dual directional coupler, designed to operate over the 0.5M to 1.0 GHz frequency range, with compact size. This model is designed to handle 200W max input power, and also performs with low insertion loss of 0.3dB max and with coupling flatness of  $\pm 0.5\text{dB}$  max, and low VSWR of 1.15 max.

### Mechanical Outline(Inch/mm):

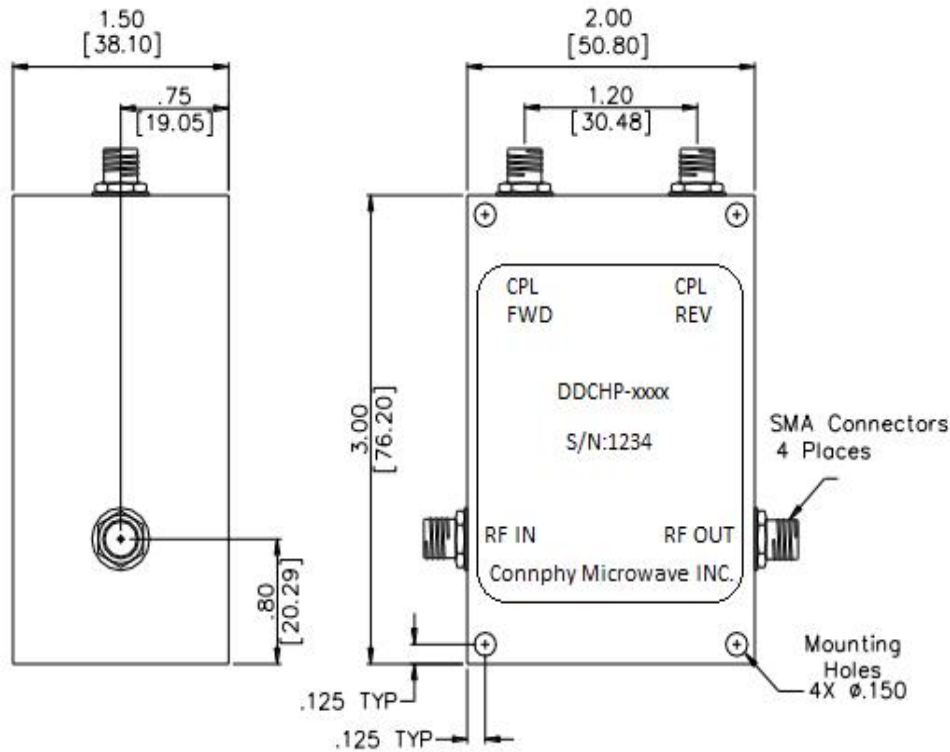

### Specifications:

Coupling:	30±1dB
Frequency:	0.5M to 0.1GHz
Insertion Loss:	0.3dB Max
Coupling flatness:	±0.5dB Max
Directivity:	25dB Min
Power Handling:	200W Max
VSWR:	1.15:1 Max
Connectors:	SMA-F(N optional)

### Environmental Ratings:

Temperature:	-25°C to +71 °C Operating -65 °C to +100 °C Non-Operating
Vibration:	MIL-STD-202F, Method 204D Cond. B
Altitude:	MIL-STD-202F, Method 105C Cond. B
Temperature Cycle:	MIL-STD-202F, Method 107D Cond. A

High Power Dual Directional Coupler DDCHP-0.5M0.1G-30-S			
DRAWN:	DWG NO.:	REV CODE: Rev.1.0	 <a href="http://www.connphy.com">www.connphy.com</a> <a href="mailto:sales@connphy.com">sales@connphy.com</a>
CHECKRD:	DATE: 18/04/15	SHEET : 1 OF 1	
ISSUED:	SIZE: A	SCALE : N / A	Notes: SPEC ARE SUBJECT TO CHANGE WITHOUT NOTICE.