


MPS-17G18.2G-0360-S 0 - 360° during frequency range, actual phase shift varies linearly, corresponding to the Frequency unit is operating at.

Features:

frequency range: 17 to 18.2G

adjustable phase shift: 0 to 360°

Mechanical Outline(Inch):

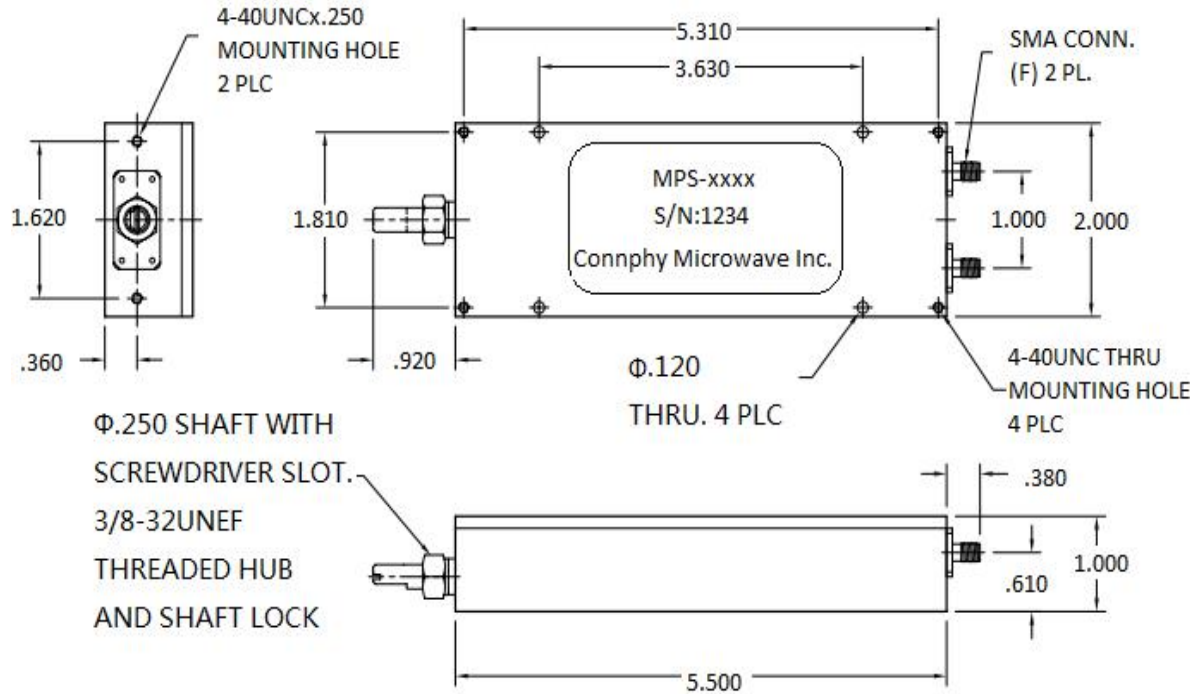

Electrical Specifications:

Frequency range:	17 to 18.2G
Adjustable Phase shift:	0 to 360°
Insertion loss:	1dB max
VSWR:	1.6:1 max
Power:	100W average, 3kW peak
Connectors:	SMA
Adjustable Group Delay:	0 to 0.169 ns
Insertion Phase @ 1.0 GHz:	320° (min setting)
Settable:	One rotation at 1.0GHz is approx 3.5°
Temperature Stability:	0.025°/DC°/GHz


Mechanical Specification:

Size:	5.5" x 2.2" x 1.0"
Body:	Aluminum
Connectors:	Stainless Steel
Control:	0.25" dia. multi-turn Non-translating shaft, with approx. 18 turns from min to max phase adjust

Environmental Ratings:

Temperature:	-25°C to +71 °C Operating -65 °C to +100 °C Non-Operating
Vibration:	MIL-STD-202F, Method 204D Cond. B
Altitude:	MIL-STD-202F, Method 105C Cond. B
Temperature Cycle:	MIL-STD-202F, Method 107D Cond. A

Manual Phase Shifter MPS-17G18.2G-0360-S

DRAWN:	DWG NO.:	REV CODE: Rev.1.0	 www.connphy.com sales@connphy.com
CHECKRD:	DATE: 12/09/15	SHEET : 1 OF 1	
ISSUED:	SIZE: A	SCALE : N / A	
			Notes: SPEC ARE SUBJECT TO CHANGE WITHOUT NOTICE.