


**MPS-DC18G-60-S-DC** 0-60°/GHz Models achieve 60° minimum of phase shift @ 1GHz, actual phase shift varies linearly, corresponding to the Frequency unit is operating at.

Example:

If operated @ 2GHz, the unit can achieve 120° phase shift min.,

If operated @ 4GHz operation, the unit can achieve 240° phase shift min., and so on.

### Mechanical Outline(Inch):

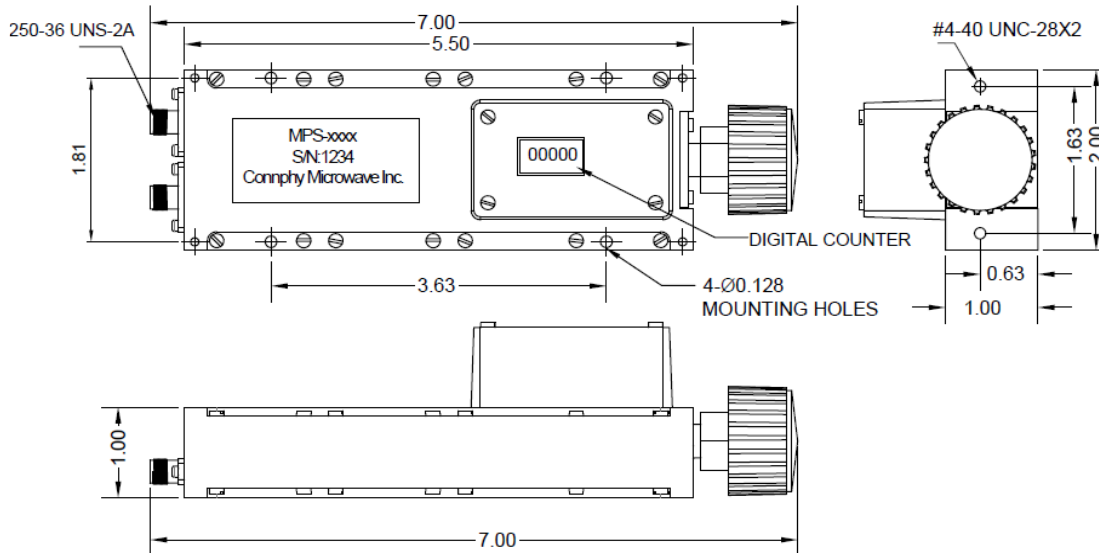

### Electrical Specifications:


Frequency range:	DC to 18 GHz
Adjustable Phase shift:	0 to 60°/GHz
Insertion loss:	1.0 dB Max
VSWR:	1.6:1 Max
Power:	100W average, 5kW peak
Connectors:	SMA Female

### Mechanical Specification:

Size:	5.5" x 2.0" x 1.0"
Body:	Aluminum
Connectors:	Stainless Steel

### Environmental Ratings:

Temperature:	-40°C to +125 °C Operating -65 °C to +120 °C Non-Operating
Vibration:	MIL-STD-202F, Method 204D Cond. B
Altitude:	MIL-STD-202F, Method 105C Cond. B
Temperature Cycle:	MIL-STD-202F, Method 107D Cond. A

Manual Phase Shifter With Digital Counter			
MPS-DC18G-60-S-DC			
DRAWN:	DWG NO.:	REV CODE: Rev.1.0	 <a href="http://www.connphy.com">www.connphy.com</a> <a href="mailto:sales@connphy.com">sales@connphy.com</a>
CHECKRD:	DATE: 12/09/15	SHEET : 1 OF 1	
ISSUED:	SIZE: A	SCALE : N / A	Notes: SPEC ARE SUBJECT TO CHANGE WITHOUT NOTICE.