


**PD-1M0.3G-06-S** is a 6 way power divider designed to operate over the 1M-0.3GHz frequency range, with compact size. This model is designed to handle 1W max input power, and also performs with low insertion loss of 1.5 dB max and high isolation of 20 dB min, and low VSWR of 1.5 max.

### Mechanical Outline(Inch/mm):

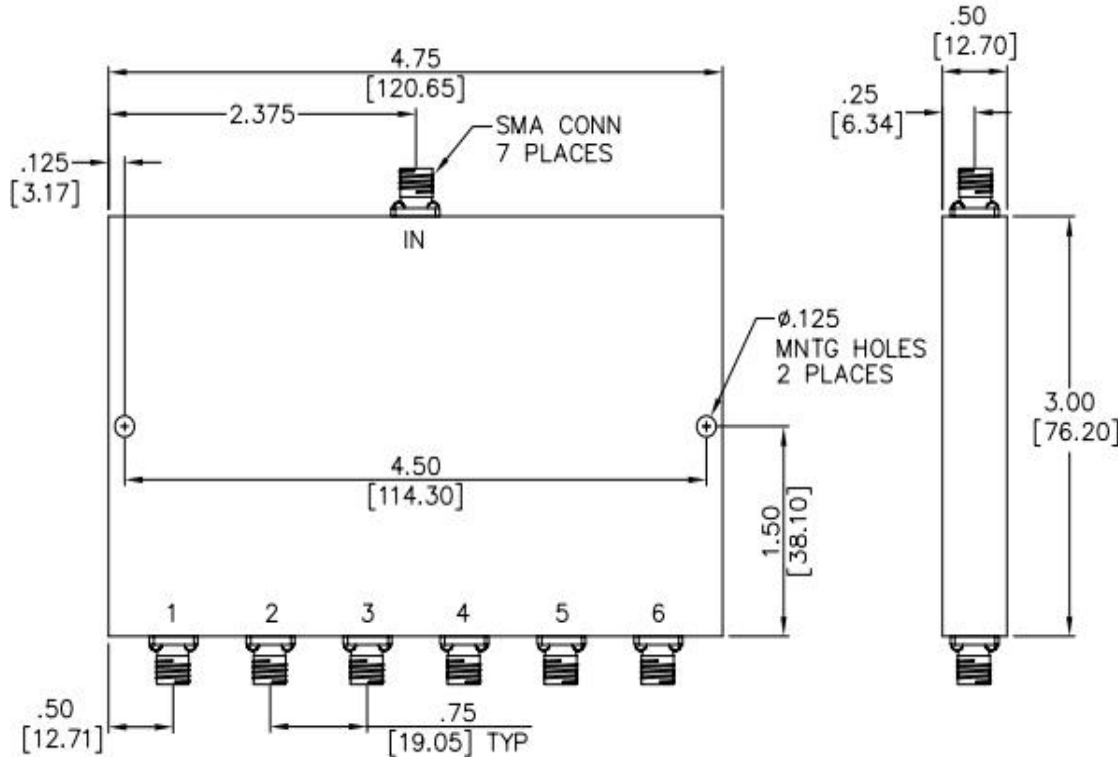


### Specifications:

Dividing into:	6 ways
Frequency:	1M-0.3GHz
Insertion Loss:	1.5dB Max
Isolation:	20dB Min
Power Handling:	1W Max
VSWR:	1.5:1
Amplitude balance:	0.4dB Max
Phase balance:	5° Max
Connectors:	SMA Female (N optional)

### Environmental Ratings:

Temperature:	-25°C to +71 °C Operating -65 °C to +100 °C Non-Operating
Vibration:	MIL-STD-202F, Method 204D Cond. B
Altitude:	MIL-STD-202F, Method 105C Cond. B
Temperature Cycle:	MIL-STD-202F, Method 107D Cond. A

Power Divider PD-1M0.3G-06-S			
DRAWN:	DWG NO.:	REV CODE: Rev.1.0	 <a href="http://www.connphy.com">www.connphy.com</a> <a href="mailto:sales@connphy.com">sales@connphy.com</a>
CHECKRD:	DATE: 15/07/15	SHEET : 1 OF 1	
ISSUED:	SIZE: A	SCALE : N / A	
Notes: SPEC ARE SUBJECT TO CHANGE WITHOUT NOTICE.			