


PD-4G8G-03-S is a 3 way power divider designed to operate over the 4-8GHz frequency range, with compact size. This model is designed to handle 30W max input power, and also performs with low insertion loss of 0.9dB max and high isolation of 16dB min, and low VSWR of 1.6max.

Mechanical Outline(Inch/mm):

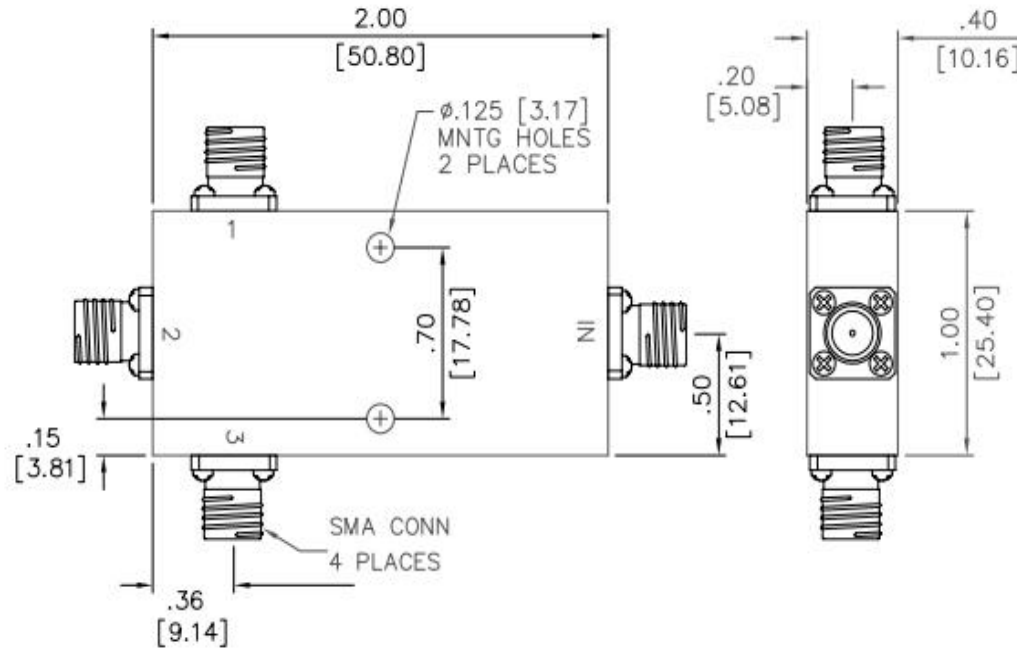


Specifications:

Dividing into: 3 ways
 Frequency: 4-8GHz
 Insertion Loss: 0.9dB Max
 Isolation: 16dB Min
 Power Handling: 30W Max
 VSWR: 1.6:1
 Amplitude balance: 0.4dB Max
 Phase balance: 8° Max
 Connectors: SMA Female

Environmental Ratings:

Temperature: -25°C to +71 °C Operating
 -65 °C to +100 °C Non-Operating
 Vibration: MIL-STD-202F, Method 204D Cond. B
 Altitude: MIL-STD-202F, Method 105C Cond. B
 Temperature Cycle: MIL-STD-202F, Method 107D Cond. A

Power Divider PD-4G8G-03-S			
DRAWN:	DWG NO.:	REV CODE: Rev.1.0	 www.connphy.com sales@connphy.com
CHECKRD:	DATE: 08/07/15	SHEET : 1 OF 1	
ISSUED:	SIZE: A	SCALE : N / A	
Notes: SPEC ARE SUBJECT TO CHANGE WITHOUT NOTICE.			