


**PD-1G26.5G-02-S** is a 2 way power divider designed to operate over the 1.0-26.5GHz frequency range, with compact size. This model is designed to handle 10W max input power, and also performs with low insertion loss of 2.5dB max and high isolation of 15dB min, and low VSWR of 1.8 max.

### Mechanical Outline(Inch/mm):

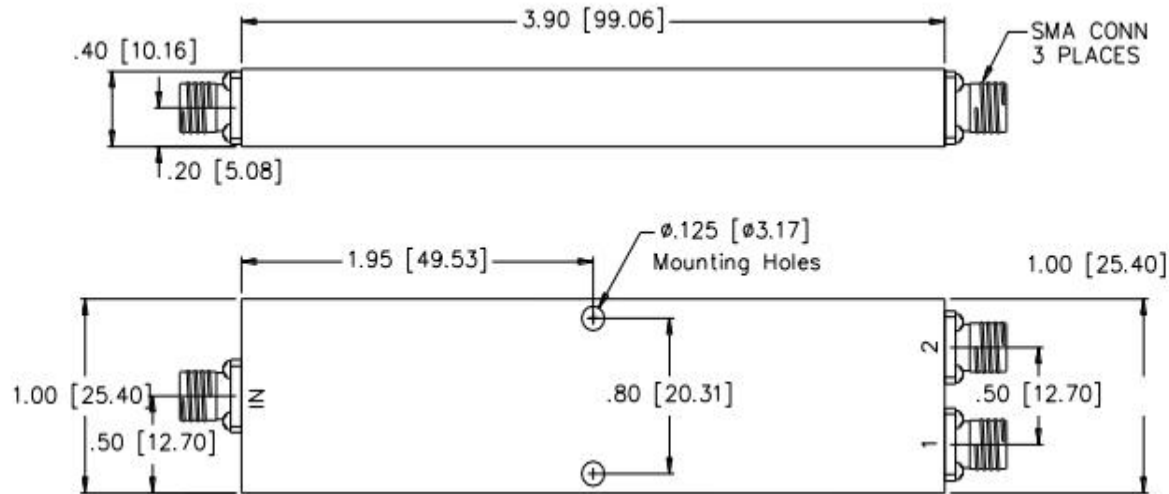


### Specifications:

Dividing into:	2 ways
Frequency:	1.0-26.5GHz
Insertion Loss:	2.5dB Max
Isolation:	15dB Min
Power Handling:	10W Max
VSWR:	1.8:1
Amplitude balance:	0.5dB Max
Phase balance:	8° Max
Connectors:	SMA Female

### Environmental Ratings:

Temperature:	-25°C to +71 °C Operating -65 °C to +100 °C Non-Operating
Vibration:	MIL-STD-202F, Method 204D Cond. B
Altitude:	MIL-STD-202F, Method 105C Cond. B
Temperature Cycle:	MIL-STD-202F, Method 107D Cond. A

Power Divider PD-1G26.5G-02-S			
DRAWN:	DWG NO.:	REV CODE: Rev.1.0	 <a href="http://www.connphy.com">www.connphy.com</a> <a href="mailto:sales@connphy.com">sales@connphy.com</a>
CHECKRD:	DATE: 08/07/15	SHEET : 1 OF 1	
ISSUED:	SIZE: A	SCALE : N / A	
			Notes: SPEC ARE SUBJECT TO CHANGE WITHOUT NOTICE.