


PD-2G40G-02-K is a 2 way power divider designed to operate over the 2.0-40.0GHz frequency range, with compact size. This model is designed to handle 10W max input power, and also performs with low insertion loss of 2.5dB max and high isolation of 13dB min, and low VSWR of 1.9 max.

Mechanical Outline(Inch/mm):

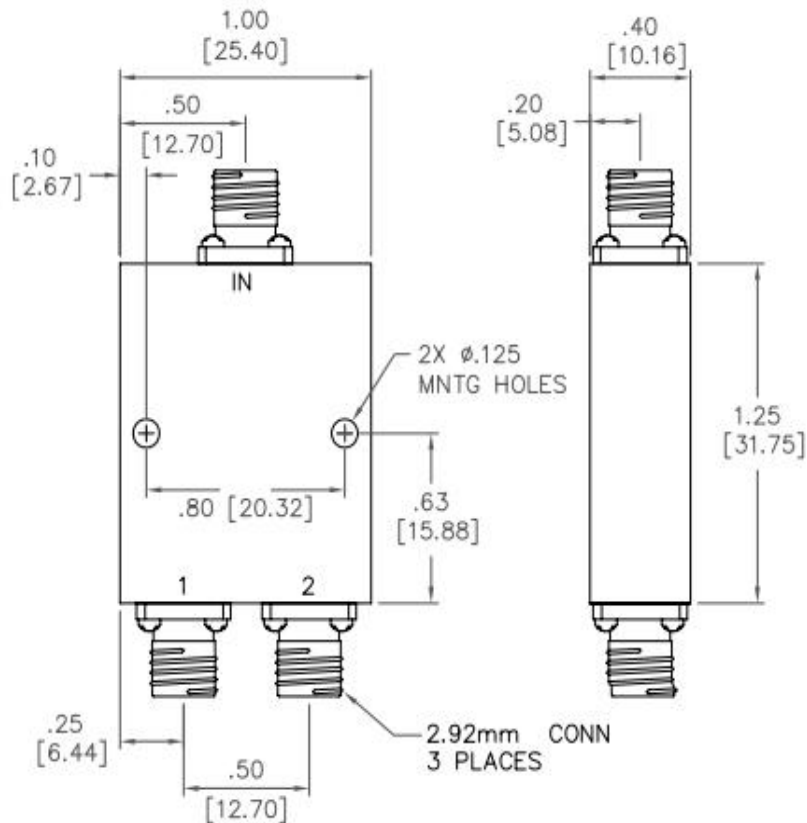


Specifications:

Dividing into:	2 ways
Frequency:	2.0 to 40.0GHz
Insertion Loss:	2.5dB Max
Isolation:	13dB Min
Power Handling:	10W Max
VSWR:	1.9:1
Amplitude balance:	0.6dB Max
Phase balance:	8.0° Max
Connectors:	2.92 Female

Environmental Ratings:

Temperature:	-25°C to +71 °C Operating
	-65 °C to +100 °C Non-Operating
Vibration:	MIL-STD-202F, Method 204D Cond. B
Altitude:	MIL-STD-202F, Method 105C Cond. B
Temperature Cycle:	MIL-STD-202F, Method 107D Cond. A

Power Divider PD-2G40G-02-K			
DRAWN:	DWG NO.:	REV CODE: Rev.1.0	 www.connphy.com sales@connphy.com
CHECKRD:	DATE: 08/07/15	SHEET : 1 OF 1	
ISSUED:	SIZE: A	SCALE : N / A	
			Notes: SPEC ARE SUBJECT TO CHANGE WITHOUT NOTICE.