


SW-2G4G-2R-S is a single pole, two throw, reflective switch designed to operate over the 2 to 4 GHz frequency range. This model is designed to handle 27dBm max input power. The switch offers fast switching speeds of 50nsec max., low insertion loss of 4.0dB and high isolation of 80dB. The DC supplies are 60mA @ ±5 V.

Mechanical Outline(Unit: Inch):

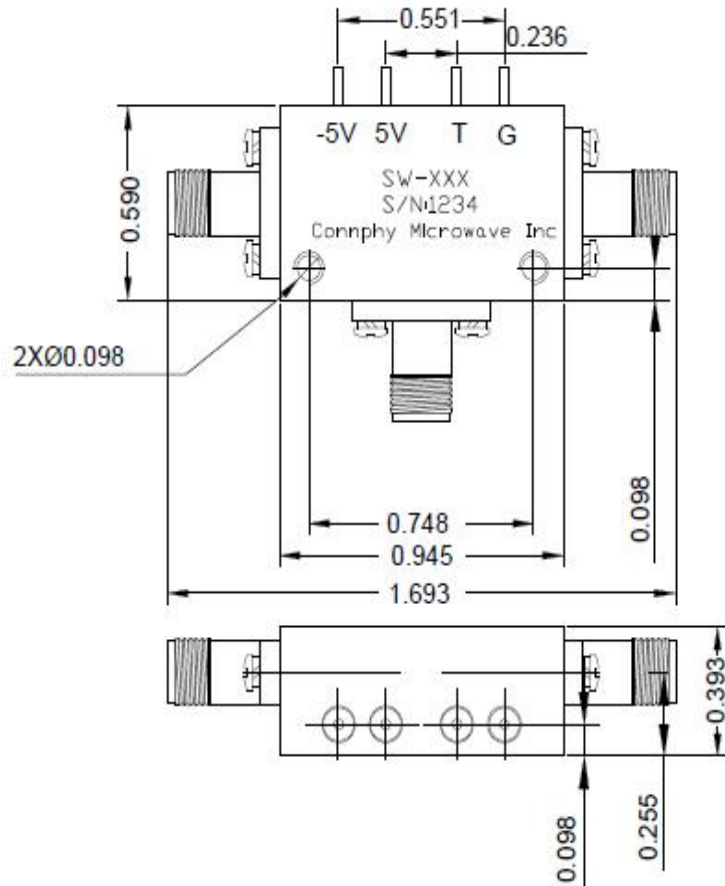


Specifications:

| | |
|------------------|--------------------|
| Frequency: | 2 to 4 GHz |
| Insertion Loss: | 1.3dB max |
| Isolation: | 80dB min |
| Switching Speed: | 50ns max |
| Power Handling: | 27dBm max |
| VSWR: | 1.5:1 max |
| Voltage/Current: | 60mA @ ±5V typical |
| Control logic: | TTL |
| Connectors: | SMA Female |
| Type: | Reflective |

Environmental Ratings:

| | |
|--------------------|--|
| Temperature: | -25°C to +71 °C Operating -65 °C to +100 °C Non-Operating |
| Vibration: | MIL-STD-202F, Method 204D Cond. B |
| Altitude: | MIL-STD-202F, Method 105C Cond. B |
| Temperature Cycle: | MIL-STD-202F, Method 107D Cond. A |

| Pin Diode Switch SW-2G4G-2R-S | | | |
|----------------------------------|-------------------|----------------------|---|
| DRAWN: | DWG NO.: | REV CODE: Rev.1.0 |  www.connphy.com sales@connphy.com |
| CHECKRD: | DATE: 20/05/16 | SHEET : 1 OF 1 | |
| ISSUED: | SIZE: A | SCALE : N / A | |
| | | | Notes: SPEC ARE SUBJECT TO CHANGE WITHOUT NOTICE. |