

CLN-0.5G18G-4230-S is a Low Noise Amplifier providing a gain of 42 dB with a noise figure of 3.0 dB. The compact size and modularity makes it ideal for a wide range of applications.


Features:

- Frequency Range: 0.5-18 GHz
- Gain: 42 dB Min
- Noise Figure: 3.0 dB Max
- Solder filtered pins for DC connection
- Low VSWR, unconditional stable

Specifications:


Frequency:	0.5- 18.0 GHz
Gain:	42 dB Min
Gain Flatness:	±2.5 dB Max
Noise Figure:	3.0 dB Max
Output P1dB:	20 dBm Min
VSWR Input:	2.5:1 Max
VSWR Output:	2.5:1 Max
DC Voltage:	+15 V Typ
DC Supply Current:	450 mA Typ
RF Connector:	SMA female

Mechanical Outline(Inches):

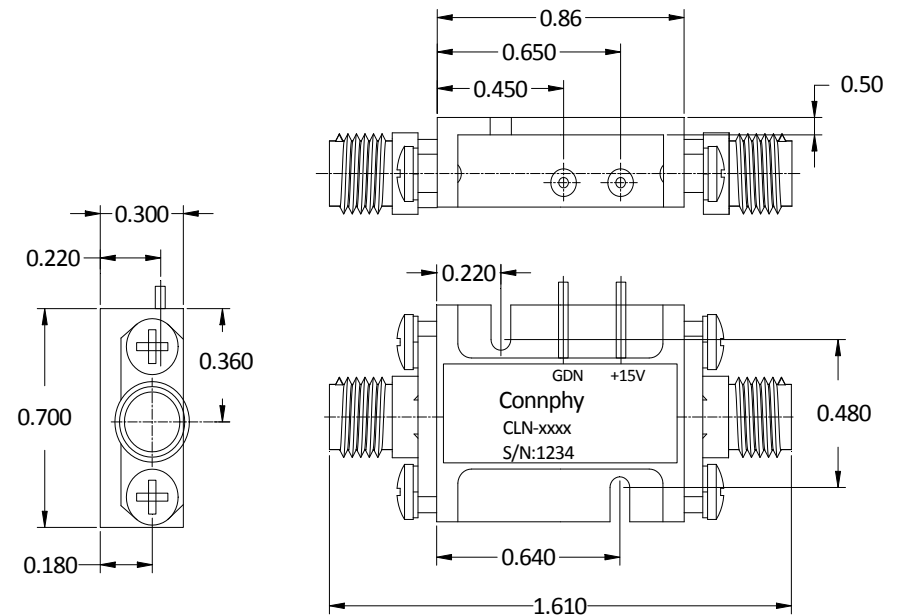

Environmental Ratings:

Temperature:	-40°C to +75 °C Operating -55 °C to +125 °C Non-Operating
Vibration:	MIL-STD-202F, Method 204D Cond. B
Altitude:	MIL-STD-202F, Method 105C Cond. B
Temperature Cycle:	MIL-STD-202F, Method 107D Cond. A

Low Noise Amplifier CLN-0.5G18G-4230-S			
DRAWN:	DWG NO.:	REV CODE: Rev.1.0	 www.connphy.com sales@connphy.com
CHECKRD:	DATE: 14/05/15	SHEET : 1 OF 1	
ISSUED:	SIZE: A	SCALE : N / A	
			Notes: SPEC ARE SUBJECT TO CHANGE WITHOUT NOTICE.