


BT-30K85G-1-V is a 1W bias tee, designed to operate over the 30K-85GHz frequency range, with compact size.

Main features:

- Designed to handle 1W max input power (current 500mA max, volatage 25Vdc max);
- High isolation of 30dB min
- Low inserttion loss of 4.0dB max, and low VSWR of 2.0max.

Mechanical Outline(Inch/mm):

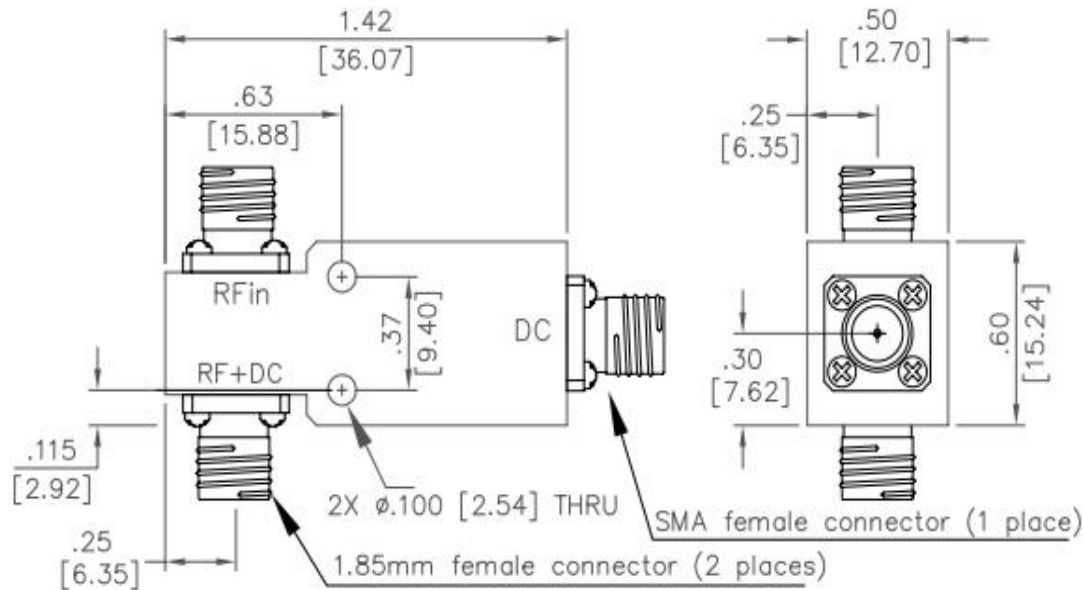


Specifications:

Frequency:	30K-85GHz
Insertion loss:	4.0dB max
Power:	1W max
Current:	500mA max
Voltage:	25Vdc max
Isolation:	30dB min
VSWR:	2.0:1 max
RF connector:	1.85-F
DC Connectors:	SMA-F (solder pin optional)

Environmental Ratings:

Temperature:	-25°C to +71 °C Operating -65 °C to +100 °C Non-Operating
Vibration:	MIL-STD-202F, Method 204D Cond. B
Altitude:	MIL-STD-202F, Method 105C Cond. B
Temperature Cycle:	MIL-STD-202F, Method 107D Cond. A

Bias Tee BT-30K85G-1-V			
DRAWN:	DWG NO.:	REV CODE: Rev.1.0	 www.connphy.com sales@connphy.com
CHECKRD:	DATE: 20/09/15	SHEET : 1 OF 1	
ISSUED:	SIZE: A	SCALE : N / A	
			Notes: SPEC ARE SUBJECT TO CHANGE WITHOUT NOTICE.