


PD-0.52G-08-S is a 8 way power divider designed to operate over the 0.5-2GHz frequency range, with compact size. This model is designed to handle 30W max input power, and also performs with low insertion loss of 1.0 dB max and high isolation of 18 dB min, and low VSWR of 1.5max.

Mechanical Outline(Inch/mm):

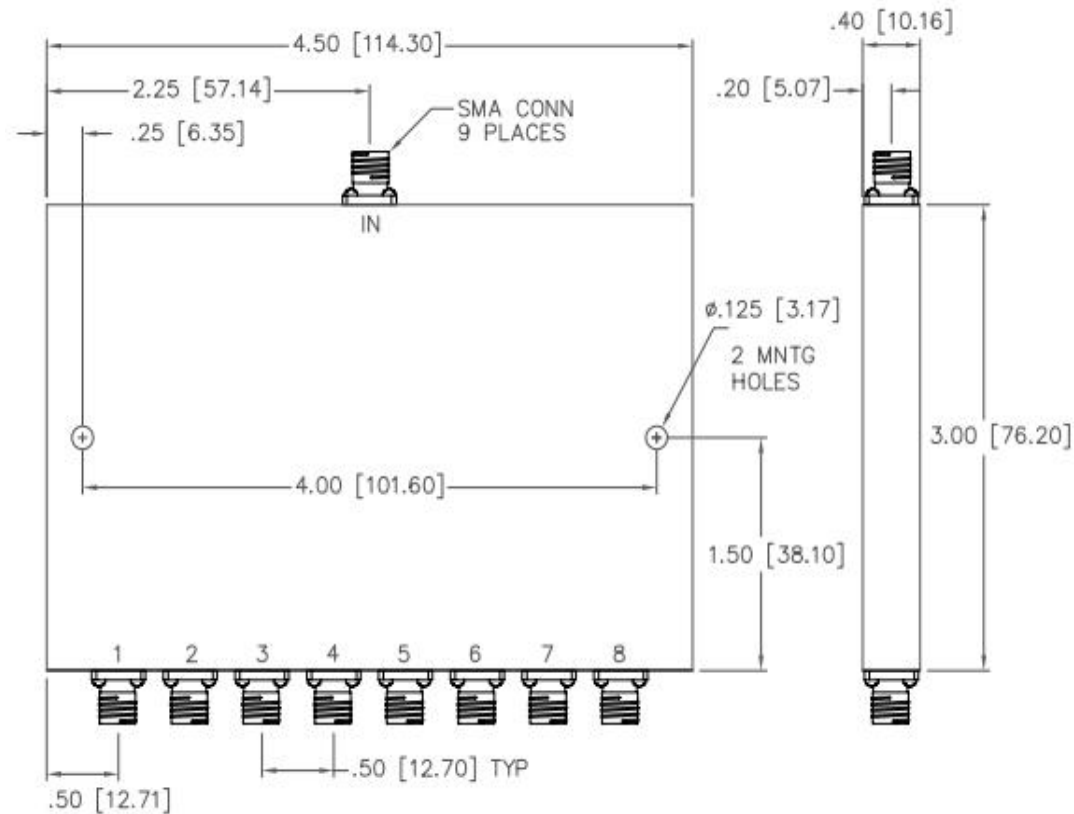


Specifications:

Dividing into:	8 ways
Frequency:	0.5-2GHz
Insertion Loss:	1.0dB Max
Isolation:	18dB Min
Power Handling:	30W Max
VSWR:	1.5:1
Amplitude balance:	0.6dB Max
Phase balance:	8° Max
Connectors:	SMA Female(N optional)

Environmental Ratings:

Temperature:	-25°C to +71 °C Operating -65 °C to +100 °C Non-Operating
Vibration:	MIL-STD-202F, Method 204D Cond. B
Altitude:	MIL-STD-202F, Method 105C Cond. B
Temperature Cycle:	MIL-STD-202F, Method 107D Cond. A

Power Divide PD-0.52G-08-S			
DRAWN:	DWG NO.:	REV CODE: Rev.1.0	 www.connphy.com sales@connphy.com
CHECKRD:	DATE: 08/07/15	SHEET : 1 OF 1	
ISSUED:	SIZE: A	SCALE : N / A	Notes: SPEC ARE SUBJECT TO CHANGE WITHOUT NOTICE.